


# 60W NON-DIMMABLE DRIVER

Product Code: NF-PS-60W-24V-HW

NOVA FLEX<sup>®</sup>

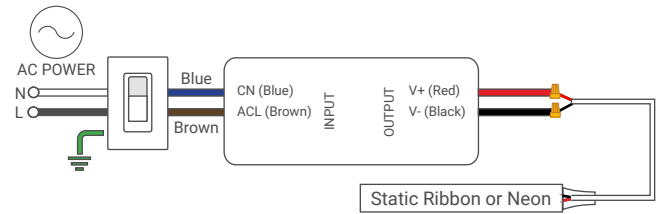

## Input

Voltage Range	90 ~ 264 VAC
Frequency	47 ~ 63 Hz
Current	1.2 A / 114 VAC
Inrush Current	30 A / 115 VAC
Efficiency	86%

## Output

Voltage	24VDC
Current	2.5 A
Ripple	150 mVp-p
Line Regulation	1%
Load Regulation	6%
Turn on Delay Time	50 ms/230 VAC
Optimal Load	Up to 95%

## Protection

Over Current	110 ~ 150; Hiccup mode
Over Voltage	27.6 ~ 32.4 V
Warranty	2 - 5 years (based on warranty of ribbon/neon purchased)


## Environment

Protection Rating	UL 1310, Class 2
Operating Temp	-4° to 113° F (-20° to 45° C)
Storage Temp	-40 ~ 176° F (-40 ~ 80°C) 10 ~ 95% HC

To meet local / national codes, this driver may require mounting in approved UL Enclosure.

## Physical

Weight	14.4 oz
--------	---------

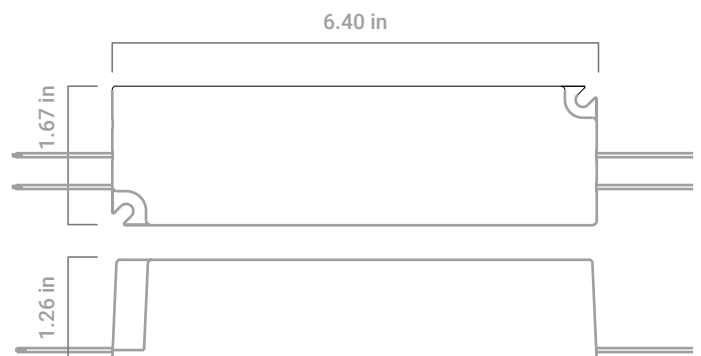

FOR MORE  
INFORMATION  
CLICK HERE

PROJECT SUPPORT

INSTALLATION GUIDES

WHY NOVA FLEX

RESOURCES