

MAXX 30W DIMMABLE DRIVER

Product Code: NF-PS-MAXX-30W-24V-0/10V

NOVA[®]FLEX[®]



Input

| | |
|----------------|-----------------------------------|
| Voltage Range | 100 - 277 VAC |
| Frequency | 47 - 63Hz |
| Current | 0.5A |
| Inrush Current | 7A, 50% @ 120VAC 12A, 50% @277VAC |
| Efficiency | 79% @ 120VAC 80% @ 277VAC |
| Power Factor | > 0.99 @ 120VAC, 0.95 @ 277VAC |
| THD | < 20% |


Output

| | |
|-----------------|-----------|
| Voltage | 24VDC |
| Current | 1.25A |
| Load Regulation | 1% |
| Optimal Load | 10% - 95% |

Dimming

| | |
|--|-------|
| Dimming Control | 0-10V |
| Dimming Level | 0.01% |
| Compatible with Lutron DVST-WH and DVT-WH dimmers. | |

Wiring Diagram

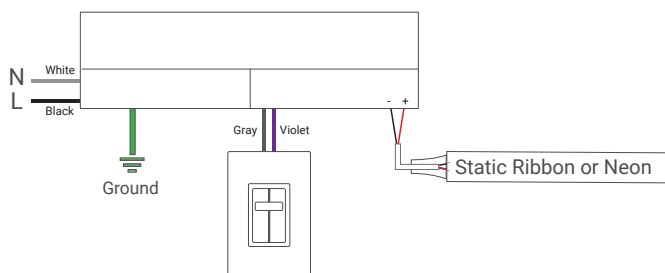

Protection


| | |
|-------------------|--|
| Over Temperature | Yes |
| Over Load | Yes |
| Short Circuit | Yes |
| Warranty | 2 - 5 years (based on warranty of ribbon/neon purchased) |
| Protection Rating | cULus Listed |

Environment

| | |
|-------------------|--|
| Protection Rating | UL Listed (UL8750), cUL Listed, Class 2 Unit, Type HL rated. FCC |
| Operating Temp | -40° to 104° F (-40° to 60° C) |
| Storage Temp | -40° to 176° F (-40° to 80° C) |
| Housing | IP66 |

Physical

| | |
|--------|---------|
| Weight | 33.5 oz |
|--------|---------|

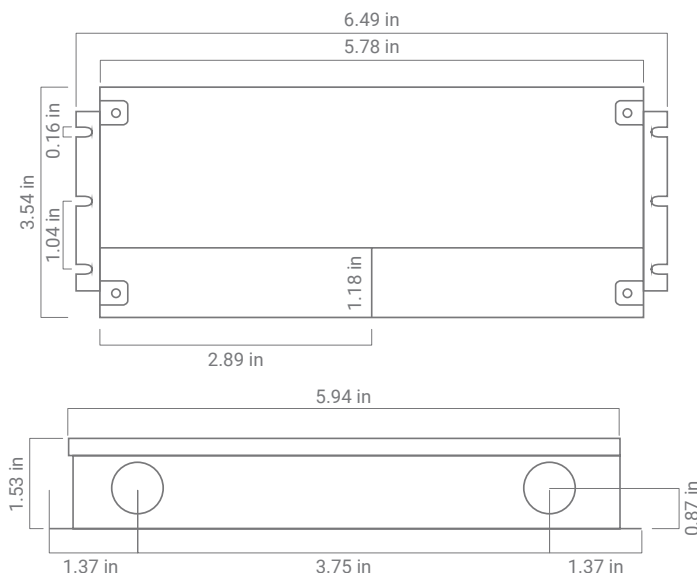

FOR MORE
INFORMATION
CLICK HERE

PROJECT SUPPORT

INSTALLATION GUIDES

WHY NOVA FLEX

RESOURCES