

# 120V NEON SIDE BEND | STATIC WHITE

# NOVA FLEX®



- Dimmable architectural-grade (dot-free)
- Great for long runs up to 164 feet to outline buildings, coves or landscape applications
- Indoor / outdoor rated
- No external driver required
- ETL Listed with hardwire or plug option
- UV resistant
- Over-voltage/-current/-temp protection
- CRI 80+
- Professional, streamlined custom-finish with 5 - 7 week lead time

Create a complete assembled solution.

Project Name

Fixture Type

Phase

Specifier

Date

SKU

SKU

SKU

SKU


## PERFORMANCE

SKU	L/ft	EFFICACY (L/w)
NF/SP-NEON-O-120V-SB-2700K	264	63
NF/SP-NEON-O-120V-SB-3000K	287	68
NF/SP-NEON-O-120V-SB-3500K	291	69
NF/SP-NEON-O-120V-SB-4000K	298	71
NF/SP-NEON-O-120V-SB-5000K	296	70
NF/SP-NEON-O-120V-SB-6500K	286	68

## QUALITY ASSURANCE

CCT Binning	3-step MacAdam
Warranty	5 Years Indoor 3 Years Outdoor <small>Warranty is 4 years for indoor and 2 years for outdoor for applications requiring more than 16 hours of daily use</small>
Lumen Maintenance	Indoor 50,000 hrs Outdoor 36,000 hrs
Certifications	ETL Listed RoHS compliant

## LIGHT DIST (3000K)

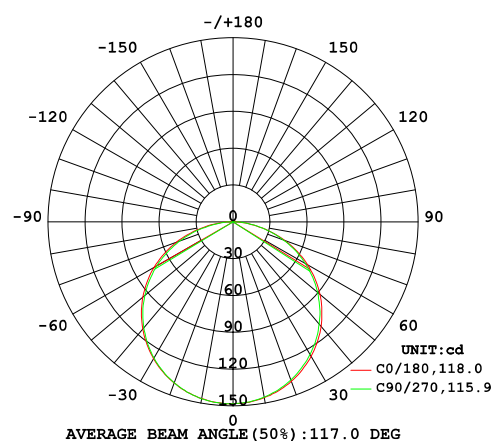

## ELECTRICAL

Power	4.2 w/ft
Voltage	120V
Wire Size	18 AWG
Lead	1.64' / 4.92'
Jumper	3" min / 48" max


Compatible Dimmers (take care not to exceed dimmer's power rating, recommended max lengths noted below):

### Dimming

Triac, Lutron DVCL-153P (max 133')  
Triac, Lutron DVELV-300P (max 66')  
Triac, Lutron DVLV-10P (all lengths, up to 164' max run of strip)

## PHYSICAL

Ambient Temp	-4° to 113°F
Environment	IP65
Mounting	Clips or Channel (rigid or bendable)
Cut Length	3.94"
Bend Diameter	4.72"
Max Run	164 ft
Dimensions	width 0.39" height 0.79"



CRI/R9 at 3000K	82 / 4
Rf/Rg at 3000K	82.2 / 94.5

Beam Angle




DOWNLOAD PHOTOMETRICS

120V NEON SIDE BEND

STATIC WHITE



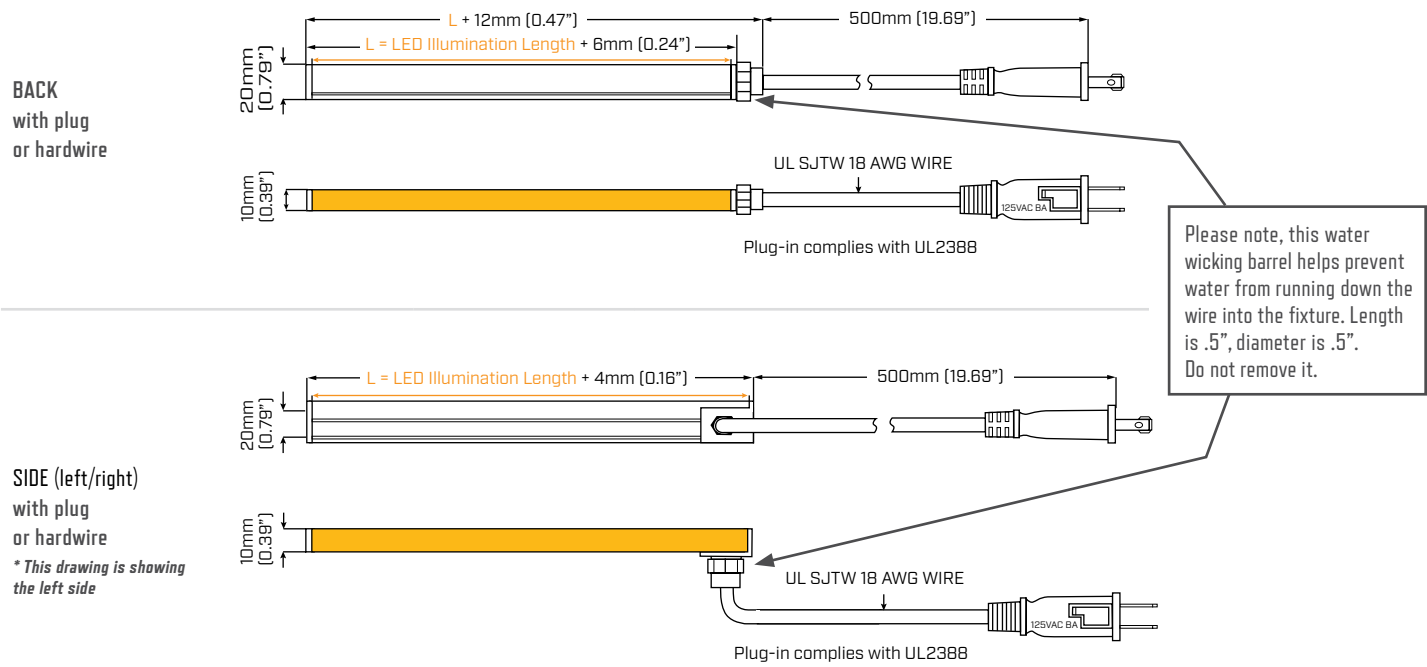

INJECTION MOLDED LEAD OPTIONS

*\*Please note, all neon products are NOT field-trimmable*



MOUNTING OPTIONS


*For all ceiling installations, we recommend the use of either the bendable serrated profile, or the rigid aluminum profile*

SKU	Dimensions	Mounting
 NF/SP-CH-NEON-120V-SB-BRACKET White Aluminum Bracket	width: 0.39" height: 0.79" length: 0.72"	1 clip every 18" mounts behind neon (1 screw/clip, 2 clips/pack)
 NF/SP-CH-NEON-120V-SB-CLIP Clear PC Clip	width: 1.25" (includes flanges for screws) height: 0.88" length: 0.56"	1 clip every 18" mounts over front of neon (2 screws/clip, 2 clips/pack)
 NF/SP-CH-NEON-120V-SB-FLEX Silver Bendable, Serrated Aluminum Profile	width: 0.51" height: 0.87" length: 10 meter rolls	1 screw every 18"  To secure this channel to the mounting surface, screws can be installed in the gaps at the bottom/base of the channel as needed. Screws can be installed on straight runs (gaps will be normal/ screws can secure the channel), and on the inside edges of curved runs. Screws won't fit on the outside edge, because the gaps will be too big. The endcaps on the non-wired end will rest inside the channel. On the wired end, endcaps with SIDE (left/right) lead wires will rest outside the channel; endcaps with BACK lead wires can rest inside the channel.
 NF/SP-CH-NEON-120V-SB-1M Silver Rigid Aluminum Profile	width: 0.51" height: 0.87" length: 1 meter	1 screw every 18" (channel has pre-drilled holes) Neon can be pressed into the channel, using even pressure, working from one end to the other. The endcaps on the non-wired end will rest inside the channel. On the wired end, endcaps with SIDE (left/right) lead wires will rest outside the channel; endcaps with BACK lead wires can rest inside the channel.


## INSTALLATION: DIMMERS

Follow all notes in the install guide supplied with the dimmer. Use only with hardwired installation. **DO NOT INSTALL DIMMER TO control outlets / plug-in receptacles or use with other loads.**


### LUTRON DVCL-153P

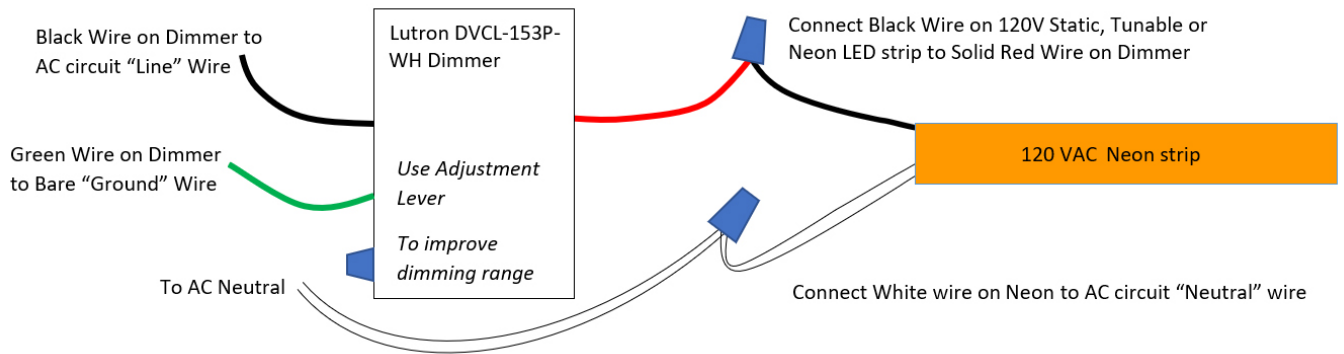

### LUTRON DVELV-300P

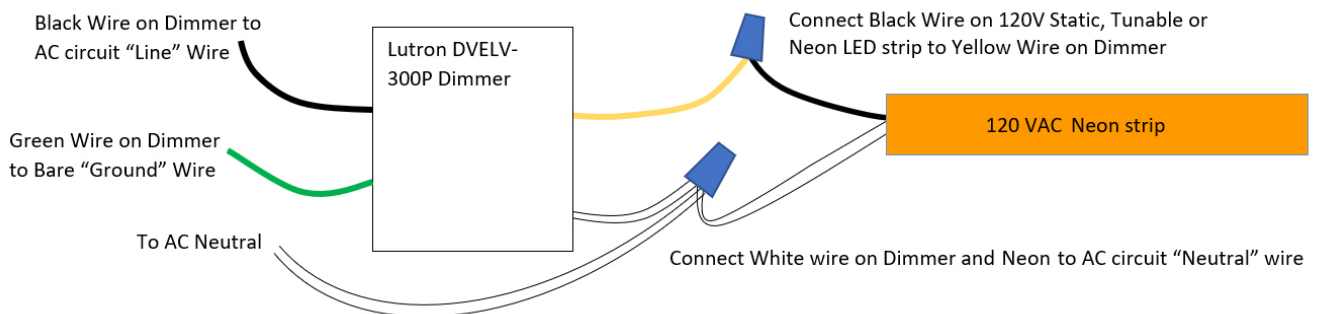

### LUTRON DVLV-10P

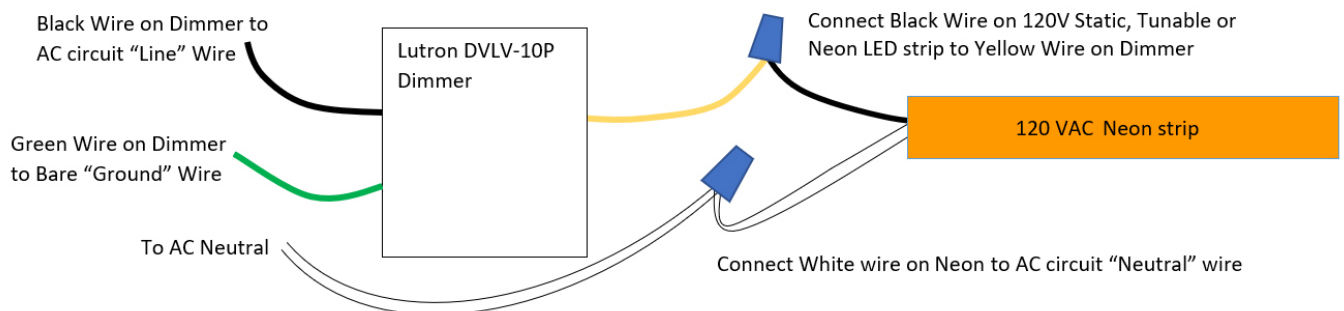

**NOTE:** Must use appropriate components that comply with local codes if installed outdoors (weather-proof connectors, cord covers, enclosures, etc). This product is NOT field-cuttable, which would void the IP rating and warranty.