


ORDER GUIDE - COB SERIES RGB

COB-RGB 4.4W | NF-COB-840



PART NUMBER BUILDER:




Notes:

Order requires lead-time of 7 - 10 weeks.
 MOQ LED COB 656 feet
 MOQ Channel 150 pcs (2M/pc)

Specifications marked 'TBD' will be populated at a later date, but are available upon request.

ENVIRONMENT AND DIMENSIONS (INCHES UNLESS SHOWN)

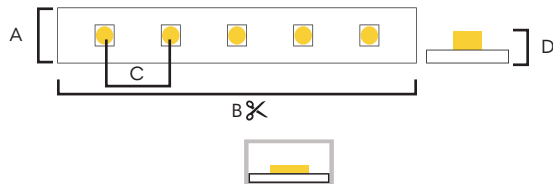

Section	I - Dry
A	0.39" (991 mm)
✕ B	1.97" (50.04 mm)
C	X
D	0.07" (1.78 mm)

KELVIN

CCT	Lumens/Ft	CRI Ra	Efficacy	Max Run
RGB	176	TBD	40	18' Ft (5.49 m)

PHYSICAL

Environment	IP20 (Dry)
Operating Temp	IP20: -4° to 140°F (-20° to 60°C)
Cut Length	1.97" Inches / 50.04 mm
Min. Bend Diameter	≥ 1.2" Inches / 30.48 mm
Max Run	18' Feet / 5.49 m

ELECTRICAL

Voltage	24V
Wire Size	20 AWG. 2 Wire
Lead Wire	Default: 120" Inch IP20: 3" Inch Minimum Quick Connect: 3" - 120" Inch
Jumper	IP20: 3" Inch Minimum
Dimming	MLV 0-10V S3i Series Controller OTHERs

QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
Warranty	5 years
CCT Binning	3-step MacAdam
Jumper	IP20: 3" Inch Minimum
Certifications	UL Title 24 JA8 - 2019

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program