

# ORDER GUIDE - COB SERIES RGB

## COB-RGB 4.4W | NF-COB-840




PART NUMBER BUILDER:

Series	Family	Kelvin	Environment	Led/M	Voltage
NF/SP	COB	RGB	I	840	24V

### Notes:

1. Special Order requires lead-time of 7 - 10 weeks.
- 2.
- 3.

## ENVIRONMENT AND DIMENSIONS (INCHES UNLESS SHOWN)

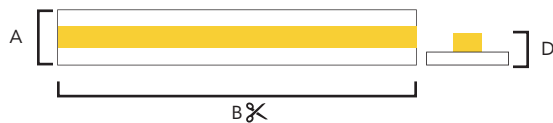

Section	I - Dry
A	0.39" (991 mm)
B	1.97" (50.04 mm)
D	0.07" (1.78 mm)

## KELVIN

CCT	Lumens/Ft	Efficacy	Max Run
RGB	176	40	18' Ft (5.49 m)

## PHYSICAL

Environment	Dry
Operating Temp	-4° to 140°F (-20° to 60°C)
Cut Length	1.97" Inches (50.04 mm)
Min. Bend Diameter	≥ 1.2" Inches (30.48 mm)
Max Run	18' Feet (5.49 m)

## ELECTRICAL

Voltage	24V
Wire Size	20 AWG. 2 Wire
Lead Wire	Default: 120" Inch 3" Inch Minimum Connect: 3" - 120" Inch
Jumper	IP20: 3" Inch Minimum
Dimming	MLV   0-10V   S3i Series Controller OTHERs

## QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
Jumper	3" Inch Minimum
Certifications	cULus   CE

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Jan.11.24.07:37

800.595.6302

novaflexled.com