


ORDER GUIDE - COB SERIES STATIC COLORS

COB-STC 3.0W | NF-COB-480




PART NUMBER BUILDER:

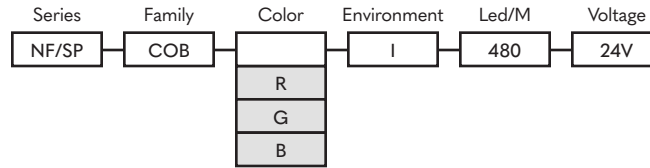

Notes:

1. Special Order requires lead-time of 7 - 10 weeks.
- 2.
- 3.

ENVIRONMENT AND DIMENSIONS (INCHES UNLESS SHOWN)

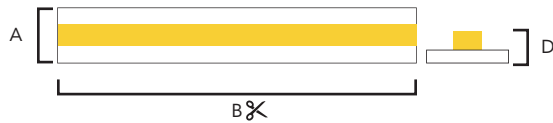

Section	I - Dry
A	0.31" (7.87 mm)
B	0.66" (16.76 mm)
D	0.07" (1.77 mm)

PHYSICAL

Environment	Dry
Operating Temp	-4° to 140°F (-20° to 60°C)
Cut Length	0.66" Inches (16.76 mm)
Min. Bend Diameter	≥ 1.2" Inches (30.48 mm)
Max Run	26' Feet (7.92 m)

ELECTRICAL

Voltage	24V
Wire Size	20 AWG. 2 Wire
Lead Wire	Default: 120" Inch 2" Inch (50.8 mm) Minimum Quick Connect: 3" - 120" Inch
Jumper	2" Inch (50.8 mm) Minimum
Dimming	MLV 0-10V S3i Series Controller OTHERs

KELVIN

CCT	Lumens/Ft	Efficacy	Max Run
RED	28	9	26 Ft (7.92 m)
GREEN	444	144	
BLUE	65	21	

QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
CCT Binning	3-step MacAdam
Jumper	IP20: 2" Inch (50.8 mm) Minimum
Certifications	cULus CE

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Jan.11.24.07:38

800.595.6302

novaflexled.com