


# ORDER GUIDE - COB SERIES STATIC COLORS

## COB-STC 3.0W | NF-COB-480



PART NUMBER BUILDER:

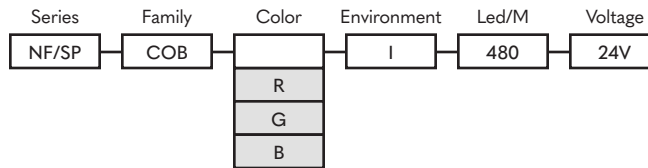


**Notes:**

Order requires lead-time of 7 - 10 weeks.  
 MOQ LED COB 656 feet  
 MOQ Channel 150 pcs (2M/pc)

Specifications marked 'TBD' will be populated at a later date, but are available upon request.

### ENVIRONMENT AND DIMENSIONS (INCHES UNLESS SHOWN)

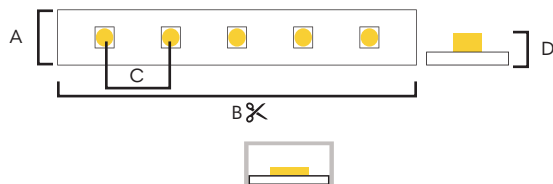

Section	I - Dry
A	0.31" (7.87 mm)
⊗ B	0.66" (16.76 mm)
C	X
D	0.07" (1.77 mm)

### KELVIN

CCT	Lumens/Ft	CRI Ra	Efficacy	Max Run
RED	28	TBD	9	26 Ft (7.92 m)
GREEN	444	TBD	144	
BLUE	65	TBD	21	

### PHYSICAL

Environment	IP20 (Dry)
Operating Temp	IP20: -4° to 140°F (-20° to 60°C)
Cut Length	0.66" Inches / 16.76 mm
Min. Bend Diameter	≥ 1.2" Inches / 30.48 mm
Max Run	26' Feet / 7.92 m

### ELECTRICAL

Voltage	24V
Wire Size	20 AWG. 2 Wire
Lead Wire	Default: 120" Inch IP20: 2" Inch (50.8 mm) Minimum  Quick Connect: 3" - 120" Inch
Jumper	IP20: 2" Inch (50.8 mm) Minimum
Dimming	MLV   0-10V   S3i Series Controller OTHERs

### QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
Warranty	5 years
CCT Binning	3-step MacAdam
Jumper	IP20: 2" Inch (50.8 mm) Minimum
Certifications	UL   Title 24   JA8 - 2019

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Oct.20.23.11:42

800.595.6302

novaflexled.com