

ORDER GUIDE - COB SERIES STATIC WHITE

COB-STW 3.0W | NF-COB-480




PART NUMBER BUILDER:

Series	Family	Environment	Led/M	Voltage	Kelvin
NF	COB	I	480	24V	
					2700K
					3000K
					3500K
					4000K
					5000K
					6500K

Notes:

Order requires lead-time of 7 - 10 weeks.
 MOQ LED COB 656 feet
 MOQ Channel 150 pcs (2M/pc)

ENVIRONMENT AND DIMENSIONS (INCHES UNLESS SHOWN)

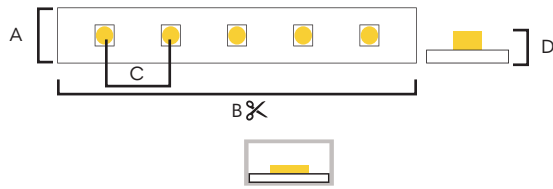

Section	I - Dry
A	0.31" (7.87 mm)
B	0.66" (16.76 mm)
C	X
D	0.07" (1.77 mm)

KELVIN

CCT	Lumens/Ft	CRI Ra	Efficacy	Max Run
2700K	303	92.3	100	26' Ft (7.92 m)
3000K	307	91.5	100	
3500K	341	92.2	103	
4000K	326	92.2	107	
5000K	307	91.8	100	
6500K	323	91.3	106	

PHYSICAL

Environment	IP20 (Dry)
Operating Temp	IP20: -4° to 140°F (-20° to 60°C)
Cut Length	0.66" Inches / 16.76 mm
Min. Bend Diameter	≥ 1.2" Inches / 30.48 mm
Max Run	26' Feet / 7.92 m

ELECTRICAL

Voltage	24V
Wire Size	20 AWG, 2 Wire
Lead Wire	Default: 120" Inch IP20: 2" Inch (50.8 mm) Minimum Quick Connect: 3" - 120" Inch
Jumper	IP20: 2" Inches (50.8 mm) Minimum
Dimming	MLV 0-10V S3i Series Controller OTHERs

QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
Warranty	5 years
CCT Binning	3-step MacAdam
Jumper	IP20: 2" Inches (50.8 mm) Minimum
Certifications	UL Title 24 JA8 - 2019

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Oct.20.23.11:53

800.595.6302

novaflexled.com