

ORDER GUIDE - COB SERIES TUNABLE WHITE

COB-TWH 6.1W | NF-COB-640



PART NUMBER BUILDER:




Notes:

Special Order requires lead-time of 7 - 10 weeks.
 MOQ LED COB 656 feet
 MOQ Channel 150 pcs (2M/pc)

Specifications marked 'TBD' will be populated at a later date, but are available upon request.

ENVIRONMENT AND DIMENSIONS (INCHES UNLESS SHOWN)

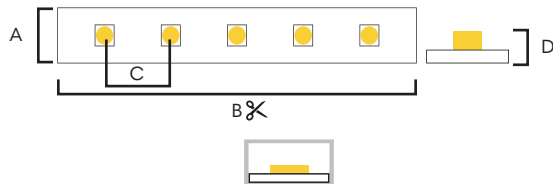

Section	I - Dry
A	0.39" (99 mm)
✕ B	1.97" (50.03 mm)
C	X
D	0.07" (1.78 mm)

KELVIN

CCT	Lumens/Ft	CRI Ra	Efficacy	Max Run
2700K	303	92.3	TBD	13' Ft (3.96 m)
3000K	307	91.5	TBD	
3500K	341	92.2	TBD	
4000K	326	92.6	TBD	
5000K	307	91.8	TBD	
6500K	323	91.3	TBD	

PHYSICAL

Environment	IP20 (Dry)
Operating Temp	IP20: -4° to 140°F (-20° to 60°C)
Cut Length	1.97" Inches / 50.04 mm
Min. Bend Diameter	≥ 1.2" Inches / 30.48 mm
Max Run	13' Feet / 3.96 m

ELECTRICAL

Voltage	24V
Wire Size	20 AWG. 2 Wire
Lead Wire	Default: 120" Inch IP20: 3" Inch (76.2 mm) Minimum Quick Connect: 3" - 120" Inch
Jumper	IP20: 3" Inch (76.2 mm) Minimum
Dimming	MLV 0-10V S3i Series Controller OTHERs

QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
Warranty	5 years
CCT Binning	3-step MacAdam
Jumper	IP20: 3" Inch (76.2 mm) Minimum
Certifications	UL Title 24 JA8 - 2019

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program