


ORDER GUIDE - DESIGN SERIES STATIC WHITE

NFDS-SWH 3.6W | NF-DS-128




PART NUMBER BUILDER:

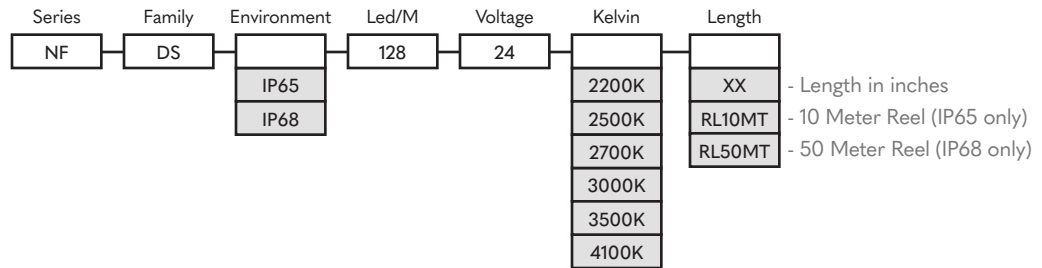

Notes:

1. All IP68 LED products are NOT field trimmable.
2. Output can vary +/- 10%.
3. Wet products requires lead time of 7-10 weeks.

ENVIRONMENT AND DIMENSIONS (INCHES UNLESS SHOWN)

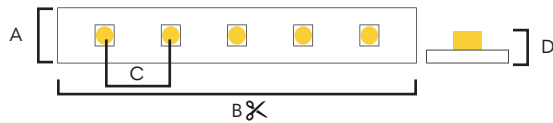

Section	IP65	IP68
A	0.40	0.47
⊗ B	2.46	2.46
C	7.48mm	7.48mm
D	0.14	0.20

PHYSICAL

Environment	IP65 (Dust/splash proof) IP68 (Water/chemical resistant)
Operating Temp	IP65: -15° to 140°F (-25° to 60°C) IP68: -15° to 176°F (-25° to 80°C)
Cut Length	2.46" Inches (6.24 cm)
Min. Bend Diameter	IP65: 0.78" Inches (20 mm) IP68: 1.96" Inches (50 mm)
Max Run	22.9" Feet (6.97 m)

ELECTRICAL

Voltage	24V
Wire Size	20 AWG. 2 Wire
Lead Wire	Default: 120" Inch IP65: 2" Inch Minimum IP68: 3" Inch Minimum Quick Connect: 3" - 120" Inch
Jumper	3" Inch Minimum
Dimming	MLV 0-10V S3i Series Controller

ILLUMINATION DETAILS

CCT	Lumens/Ft	CRI Ra	Efficacy	Max Run
2200K	205	87	57	22.9f
2500K	234	90	65	
2700K	316	93	88	
3000K	322	92	89	
3500K	328	93	91	
4100K	312	92	87	

QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
Warranty	5 years
CCT Binning	3-step MacAdam
Certifications	UL Title 24 JA8 - 2019

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Jul.26.24.02:29

800.595.6302

novaflexled.com