


# ORDER GUIDE - DESIGN SERIES STATIC WHITE

## NFDS-STW 4.4W | NF-DS-160




PART NUMBER BUILDER:

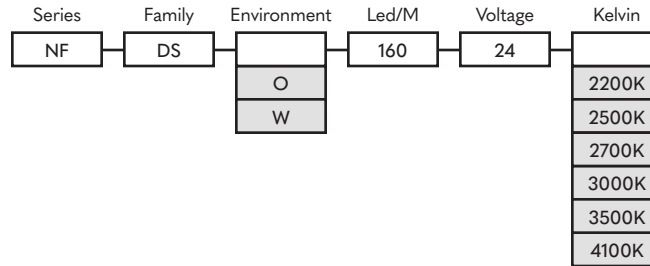

Notes:  
W (IP68) requires lead time of 7-10 weeks.

### ENVIRONMENT AND DIMENSIONS (INCHES UNLESS SHOWN)

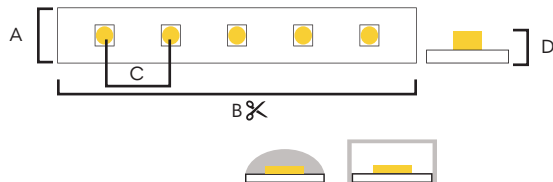

Section	O - Damp	W - Wet
A	0.40	0.47
B	1.97	1.97
C	5.98mm	5.98mm
D	0.14	0.20

### KELVIN

CCT	Lumens/Ft	CRI Ra	Efficacy	Max Run
2200K	272	90	62	18f
2500K	326	92	74	
2700K	424	93	96	
3000K	397	92	90	
3500K	407	92	93	
4100K	411	92	93	

### PHYSICAL

Environment	IP65 (Dust/splash proof) IP68 (Water/chemical resistant)
Operating Temp	IP65: -15° to 140°F (-25° to 60°C) IP68: -15° to 176°F (-25° to 80°C)
Cut Length	4.92" Inches
Min. Bend Diameter	1.57" Inches
Max Run	31.0" Feet

### ELECTRICAL

Voltage	24v
Wire Size	20 AWG, 2 Wire
Lead Wire	Default: 120" Inch IP65: 2" Inch Minimum IP68: 3" Inch Minimum Quick Connect: 3" - 120" Inch
Jumper	IP65 & IP68: 3" Inch Minimum
Dimming	MLV   0-10V   S3i Series Controller

### QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
Warranty	5 years
CCT Binning	3-step MacAdam
Jumper	IP65 & IP68: 3" Inch Minimum
Certifications	UL   Title 24   JA8 - 2019

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Oct.20.23.11:19

800.595.6302

novaflexled.com