

ORDER GUIDE - PRO SERIES STATIC WHITE

NFPS SWH 1.5W | NF-PRO-60



PART NUMBER BUILDER:


Series	Family	Environment	LEDs/M	Voltage	Temperature
NF	PRO	O - DMP W - WET	60	24V	2500K* 2700K 3000K 3225K 4100K 5500K* 6200K

Notes:

*Temperatures available with a lead time of 7 - 10 weeks

MOQ LED Strip 328' Ft (99.98 m)
MOQ Channel 150 pcs (2m/pc)

ENVIRONMENT AND DIMENSIONS (INCHES UNLESS NOTED)

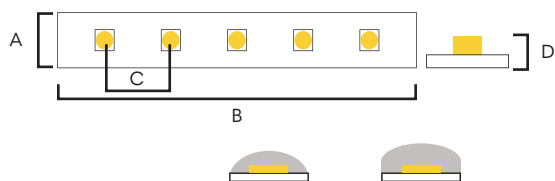

Section	Damp	Wet
A	0.40" (10.16 mm)	0.52" (13.21 mm)
B	3.93" (9.98 cm)	3.93" (9.98 cm)
C	0.65" (16.4 mm)	0.65" (16.4 mm)
D	0.14" (3.56 mm)	0.22" (5.59 mm)

PHYSICAL

Environment	IP65 (Dust/Splash Proof) IP68 (Water/ Chemical Resistant)
Ambient Temp	-15° to 140°F (-25° to 60° C)
Cut Length	3.93" Inches (9.98 cm)
Max Run	48.8' Feet (14.87 m)
Dimensions	IP65 - W: 0.40" Inches (10.16 mm) IP65 - H: 0.14" Inches (3.56 mm) IP68 - W: 0.52" Inches (13.21 mm) IP68 - H: 0.22" Inches (5.59 mm)

ILLUMINATION DETAILS

CCT	Lumens/Ft	CRI Ra	Efficacy	Max Run
2500K	89	82	57	48.8' Ft (14.87 m)
2700K	94	81	63	
3000K	115	81	77	
3225K	103	83	67	
4100K	101	84	67	
5500K	98	82	67	
6200K	85	87	58	

ELECTRICAL

Voltage	24V
Wire Size	20 AWG. 2 Wire
Lead Wire	Default: 120" Inch IP65: 2" Inch (50.8 mm) Minimum IP65: 3" Inch (76.2 mm) Minimum Quick Connect: 3" - 120" Inch
Jumper	IP65 & IP68: 3" Inch (76.2 mm) Minimum
Dimming	MLV 0-10V S3i Series Controller OTHERs

QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
Warranty	5 years
CCT Binning	3-step MacAdam
Certifications	UL Title 24 JA8 - 2019

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Oct.20.23.04:34

800.595.6302

novaflexled.com