


ORDER GUIDE - PRO SERIES STATIC WHITE

NFPS SWH 3.0W | NF-PRO-120



PART NUMBER BUILDER:

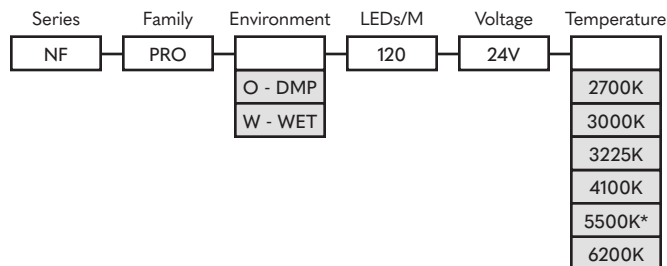


Notes:

*Temperatures available with a lead time of 7 - 10 weeks

MOQ LED Strip 328' Ft (99.98 m)
MOQ Channel 150 pcs (2m/pc)

ENVIRONMENT AND DIMENSIONS (INCHES UNLESS NOTED)

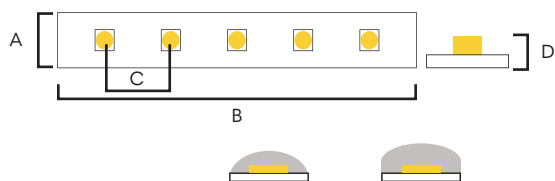

Section	Damp	Wet
A	0.40" (10.16 mm)	0.52" (13.21 mm)
B	1.96" (4.98 cm)	1.96" (4.98 cm)
C	3.19" (8.10 mm)	3.19" (8.10 mm)
D	0.14" (3.56 mm)	0.22" (5.59 mm)

PHYSICAL

Environment	IP65 (Dust/Splash Proof) IP68 (Water/ Chemical Resistant)
Ambient Temp	-15° to 140°F (-25° to 60° C)
Cut Length	1.96" Inches (4.98 cm)
Max Run	30.3' Feet (9.24 m)
Dimensions	IP65 - W: 0.40" Inches (10.16 mm) IP65 - H: 0.14" Inches (3.56 mm) IP68 - W: 0.52" Inches (13.21 mm) IP68 - H: 0.22" Inches (5.59 mm)

ILLUMINATION DETAILS

CCT	Lumens/Ft	CRI Ra	Efficacy	Max Run
2700K	214	80	71	30.3' Ft (9.24 m)
3000K	210	81	70	
3225K	197	83	66	
4100K	212	83	71	
5500K	208	82	69	
6200K	172	83	57	

ELECTRICAL

Voltage	24V
Wire Size	20 AWG. 2 Wire
Lead Wire	Default: 120" Inch IP65: 2" Inch (50.8 mm) Minimum IP65: 3" Inch (76.2 mm) Minimum Quick Connect: 3" - 120" Inch
Jumper	IP65 & IP68: 3" Inch (76.2 mm) Minimum
Dimming	MLV 0-10V S3i Series Controller OTHERs

QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
Warranty	5 years
CCT Binning	3-step MacAdam
Certifications	UL Title 24 JA8 - 2019

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Oct.20.23.04:34

800.595.6302

novaflexled.com