

# ORDER GUIDE - PRO SERIES STATIC WHITE

## NFPS SWH 5.9W | NF-PRO-240



PART NUMBER BUILDER:

Series	Family	Environment	LEDs/M	Voltage	Temperature
NF	PRO	<div>O - DMP</div> <div>W - WET</div>	240	24V	<div>2700K</div> <div>3000K</div> <div>3225K</div> <div>4100K</div> <div>5500K*</div>


### Notes:

- \*Temperatures available with a lead time of 7 - 10 weeks
- All Wet LED products are NOT field trimmable.
- 

- 
- 
- 

## ENVIRONMENT AND DIMENSIONS

IN INCHES UNLESS NOTED

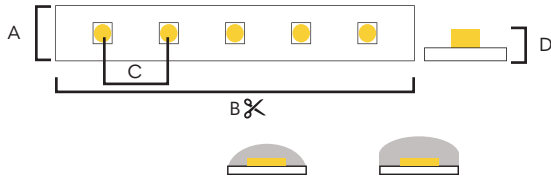

Section	Damp	Wet
A	0.55" (13.97 mm)	0.70" (17.78 mm)
B	0.98" (24.89 mm)	0.98" (24.89 mm)
C	0.32" (8.10 mm)	0.32" (8.10 mm)
D	0.14" (3.56 mm)	0.28" (7.11 mm)

## ILLUMINATION DETAILS

CCT	Lumens/Ft	CRI Ra	Efficacy	Max Run
2700K	384	81	65	15.4' Ft (4.69 m)
3000K	368	81	62	
3225K	417	84	71	
4100K	421	83	71	
5500K	407	83	69	

## PHYSICAL

Environment	Damp (Dust/Splash Proof) Wet (Water/ Chemical Resistant)
Ambient Temp	-15° to 140°F (-25° to 60° C)
Cut Length	0.98" Inches (2.49 cm)
Max Run	15.4' Feet (4.69 m)

## ELECTRICAL

Voltage	24V
Wire Size	20 AWG. 2 Wire
Lead Wire	Default: 120" Inch Damp: 2" Inch (50.8 mm) Minimum Wet: 3" Inch (76.2 mm) Minimum Quick Connect: 3" - 120" Inch
Jumper	3" Inch (76.2 mm) Minimum
Dimming	MLV   0-10V   S3i Series Controller OTHERs

## QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
Warranty	5 years
CCT Binning	3-step MacAdam
Certifications	UL

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Feb.12.24.11:01

800.595.6302

novaflexled.com