


ORDER GUIDE - PRO SERIES TUNABLE WHITE

NFPS TWH 1.0W-3.0W | NF-AS-120




PART NUMBER BUILDER:

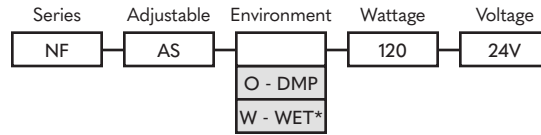

Notes:
*IP67 is available with a lead time of 7 - 10 weeks

ENVIRONMENT AND DIMENSIONS (INCHES UNLESS NOTED)

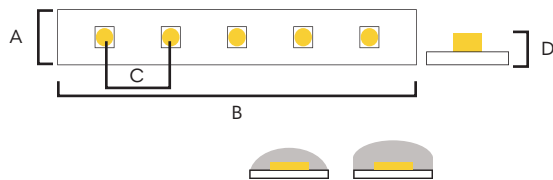

Section	Damp	Wet
A	0.40" (10.16 mm)	0.47" (11.94 mm)
B	3.93" (9.98 cm)	0.98" (24.89 mm)
C	0.31" (7.85 mm)	0.31" (7.85 mm)
D	0.14" (3.56 mm)	0.20" (5.08 mm)

ILLUMINATION DETAILS

CCT	Lumens/Ft	CRI Ra	Efficacy	Max Run
3000K - 5000K	90 - 184	83.8	30 - 61	16.4' Ft (5 m)

PHYSICAL

Environment	IP65 (Dust/Splash Proof) IP68 (Water/ Chemical Resistant)
Ambient Temp	-15° to 140°F (-25° to 60° C)
Cut Length	3.28" Inches / 8.33 cm
Max Run	16.4' Feet / 5 m
Dimensions	IP65 - W: 0.40" Inches (1.01 mm) IP65 - H: 0.14" Inches (3.56 mm) IP68 - W: 0.47" Inches (1.19 mm) IP68 - H: 0.20" Inches (0.50 mm)

ELECTRICAL

Voltage	24V
Wire Size	20 AWG. 2 Wire
Lead Wire	Default: 120" Inch IP65: 2" Inch (50.8 mm) Minimum IP65: 3" Inch (76.2 mm) Minimum Quick Connect: 3" - 120" Inch
Jumper	IP65 & IP68: 3" Inch (76.2 mm) Minimum
Dimming	MLV 0-10V S3i Series Controller OTHERs

QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
Warranty	5 years
CCT Binning	3-step MacAdam
Certifications	UL Title 24 JA8 - 2019

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Oct.20.23.04:41

800.595.6302

novaflexled.com