

ORDER GUIDE - PRO SERIES TUNABLE WHITE

NFPS TWH 1.0W-3.0W | NF-AS-120



PART NUMBER BUILDER:


Series	Adjustable	Environment	Wattage	Voltage	Length	
NF	AS	<div>O - DMP</div> <div>W - WET*</div>	120	24V	<div>XX</div> <div>RL10MT</div> <div>RL50MT</div>	<div>- Length in inches</div> <div>- 10 Meter Reel (DMP only)</div> <div>- 50 Meter Reel (WET only)</div>

Notes:

- *Wet available with a lead time of 7 - 10 weeks
- All Wet LED products are NOT field trimmable.

ENVIRONMENT AND DIMENSIONS

IN INCHES UNLESS NOTED

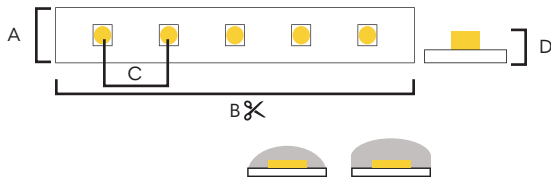

Section	Damp	Wet
A	0.40" (10.16 mm)	0.47" (11.94 mm)
B	3.93" (9.98 cm)	3.93" (9.98 mm)
C	0.31" (7.85 mm)	0.31" (7.85 mm)
D	0.14" (3.56 mm)	0.20" (5.08 mm)

ILLUMINATION DETAILS

CCT	Lumens/Ft	CRI Ra	Efficacy	Max Run
3000K - 5000K	90 - 184	83.8	30 - 61	16.4' Ft (5 m)

PHYSICAL

Environment	Damp (Dust/Splash Proof) Wet (Water/ Chemical Resistant)
Ambient Temp	-15° to 140°F (-25° to 60° C)
Cut Length	3.93" Inches (9.98 cm)
Max Run	16.4' Feet (5 m)

ELECTRICAL

Voltage	24V
Wire Size	20 AWG. 2 Wire
Lead Wire	Default: 120" Inch Damp: 2" Inch (50.8 mm) Minimum Wet: 3" Inch (76.2 mm) Minimum Quick Connect: 3" - 120" Inch
Jumper	3" Inch (76.2 mm) Minimum
Dimming	MLV 0-10V S3i Series Controller OTHERs

QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
Warranty	2 years
CCT Binning	3-step MacAdam
Certifications	UL

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Mar.15.24.03:59

800.595.6302

novaflexled.com