

# ORDER GUIDE - FLEX LINE STATIC COLOR

## 120V FLEX LINE | 2.8 LINE2-120V




PART NUMBER:

Series	Family	Environment	Voltage	LEDs/M	Color
NF/SP	LINE2	O	120V	80	
					RD
					PK
					BL
					GR
					YL

Notes:


### ENVIRONMENT AND DIMENSIONS (INCHES UNLESS SHOWN)

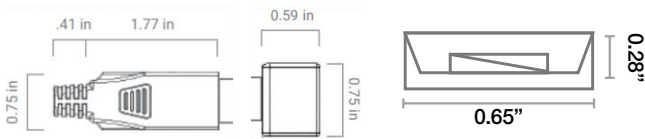

### PHYSICAL

Environment	Damp (Dust/splash proof)
Ambient Temp	-4° to 113°F
Cut Length	4" Inches (10.16 cm)
Min. Bend Diameter	≥3.94" Inches (Top - Vertical Bend)
Max Run	16.4' Feet (4.99 m)
Dimensions	W: 0.65" Inches (16.5 mm) H: 0.28" Inches (7.11 mm)

### ILLUMINATION DETAILS

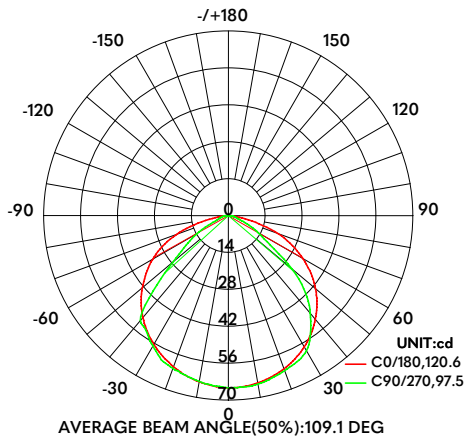

Beam Angle	120°
CCT Binning SDCM	3-Step MacAdam
Lumens / Ft	49-279
Efficacy (L/W)	13 - 101

### POWER DETAILS

Watts Per Foot	2.8 W/Ft
Voltage	120 VDC
Wire Size	18 AWG, 2 Wire
Lead	1.64' Feet or 4.92' Feet
Jumper	3" Inch Min / 48" Inch Max
Lumen Maintenance	50,000 Indoor Hours 36,000 Outdoor Hours
Waranty	3 Years
Certifications	ETL Listed

CCT	Lumens/Ft	Efficacy (lm/w)	Power (w/ft)
RED	49	18	2.8
PINK	148	53	2.8
BLUE	39	13	2.9
GREEN	279	101	2.8
YELLOW	170	58	2.9

Nova Flex LED, LLC retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Jan.11.24.12:02

800.595.6302

novaflexled.com