


ORDER GUIDE - FLEX LINE STATIC WHITE

120V FLEX LINE | 4.5 LINE2-120V




PART NUMBER:

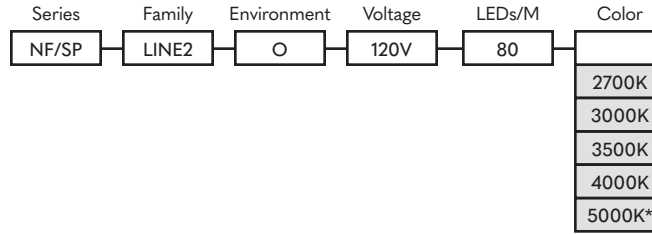

Notes:
5000K requires lead time of 7-10 weeks.


ENVIRONMENT AND DIMENSIONS (INCHES UNLESS SHOWN)

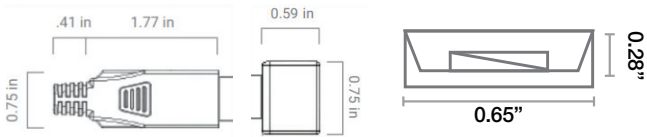

PHYSICAL

Environment	Damp (Dust/splash proof)
Ambient Temp	-4° to 113°F
Cut Length	4" Inches (10.16 cm)
Min. Bend Diameter	≥3.94" Inches (Top - Vertical Bend)
Max Run	164' Feet (49.99 m)
Dimensions	W: 0.65" Inches (16.5 mm) H: 0.28" Inches (7.11 mm)

ILLUMINATION DETAILS @ 3000K

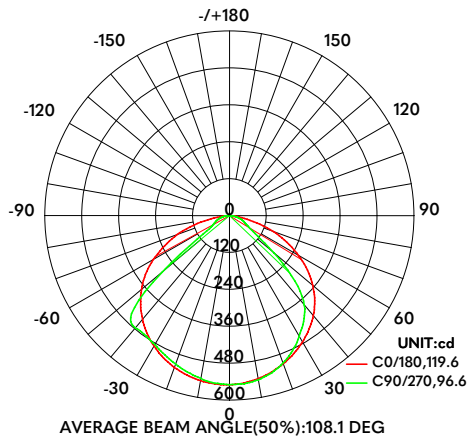

POWER DETAILS

Watts Per Foot	4.5 W/Ft
Voltage	120 VDC
Wire Size	18 AWG, 2 Wire
Lead	1.64' Feet / 4.92' Feet
Jumper	3" Inch Min / 48" Inch Max
Lumen Maintenance	50,000 Indoor Hours 36,000 Outdoor Hours
Waranty	3 Years
Certifications	ETL Listed

Beam Angle	120°
CRI/R9 at 3000K	93 / 66
Rf/Rg at 3000K	92 / 99
CCT Binning SDCM	Neon < 5 / LED < 2.3
Lumens / Ft	394 - 425
Efficacy (L/W)	88 - 94
CCT Range	2700K - 5000K

CCT	Lumens/Ft	CRI Ra	CRI R9	TM30 Rf	TM30 Rg
2700K	397	93.5	64	TBD	TBD
3000K	412	93.2	66	92	99
3500K	414	93	65	TBD	TBD
4000K	425	93.7	71	TBD	TBD
5000K	394	92.9	69	90	98

Nova Flex LED, LLC retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Jan.11.24.07:07

800.595.6302

novaflexled.com