

ORDER GUIDE - FLEX LINE TUNABLE WHITE

120V FLEX LINE | 3.6 LINE2-120V




PART NUMBER:

Series	Family	Environment	LEDs/M	Voltage	Kelvin
NF	LINE2	O	80	120V	TN

Notes:


ENVIRONMENT AND DIMENSIONS (INCHES UNLESS SHOWN)

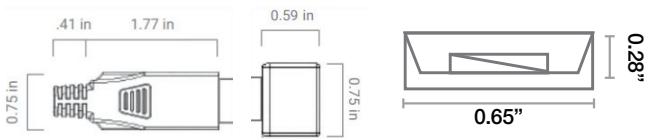

PHYSICAL

Environment	Damp (Dust/splash proof)
Ambient Temp	-4° to 113°F
Cut Length	6" Inches (15.24 cm)
Min. Bend Diameter	≥3.94" Inches (Top - Vertical Bend)
Max Run	164' Feet (49.99 m)
Dimensions	W: 0.64" Inches (16.26 mm) H: 0.28" Inches (7.11 mm)

ILLUMINATION DETAILS @ 3500K

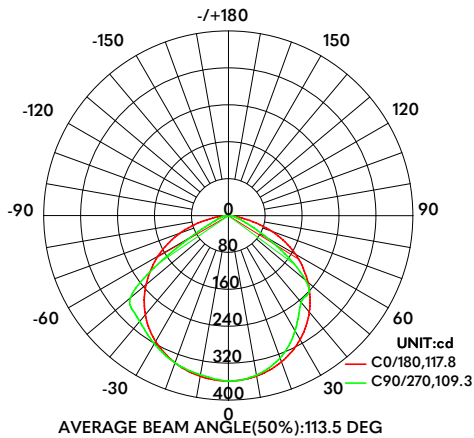

POWER DETAILS

Watts Per Foot	3.6 W/Ft
Voltage	120 VDC
Wire Size	18 AWG, 2 Wire
Lead	1.64' Feet / 4.92' Feet
Jumper	3" Inch Min / 48" Inch Max
Lumen Maintenance	50,000 Indoor Hours 36,000 Outdoor Hours
Waranty	3 Years
Certifications	ETL Listed

CCT	Lumens/Ft	CRI Ra	Efficacy	Max Run
2700K - 5000K	302	93	84	164' Ft (49.99 m)

Beam Angle	120°
CRI/R9 at 3500K	93
Rf/Rg at 3500K	98
CCT Binning SDCM	Neon < 5 / LED < 2.3
Lumens / Ft	302
Efficacy (L/W)	87.89 - 94.33
CCT Range	2700K - 5000K

Nova Flex LED, LLC retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Jan.11.24.06:20

800.595.6302

novaflexled.com