

ORDER GUIDE - SIDE BEND STATIC COLOR

120V 3.0W | NF-SBD-STC




PART NUMBER:

Series	Family	Environment	Voltage	Bend	Kelvin
NF/SP	NEON	O	120V	SB	
					R
					G
					B
					A
					P

Notes:

- Great for long runs up to 164' to outline buildings, coves or landscape applications.
- Custom finish with 3-5 week lead-time for orders up to 1000 ft. ; 5-7 weeks for larger orders.
- Warranty is 4 years indoors and 2 years outdoor for applications requiring more than 16 hours of daily use.
- Indoor and Outdoor rated.
- ETL Listed with hardwire or plug option.


ENVIRONMENT AND DIMENSIONS (INCHES UNLESS SHOWN)

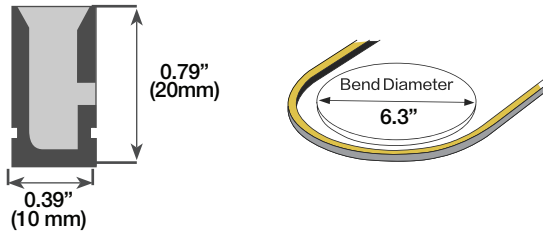

PHYSICAL

Environment	Damp (Dust/splash proof)
Ambient Temp	-4° to 113°F (-20° to 45°C)
Cut Length	12" Inches / 30.48 cm
Min. Bend Diameter	6.3" Inches / 16 cm
Max Run	164' Feet / 49.99 m
Dimensions	W: 0.83 Inches (21.08 mm) H: 0.59 Inches (14.99 mm)

ILLUMINATION DETAILS (RED)

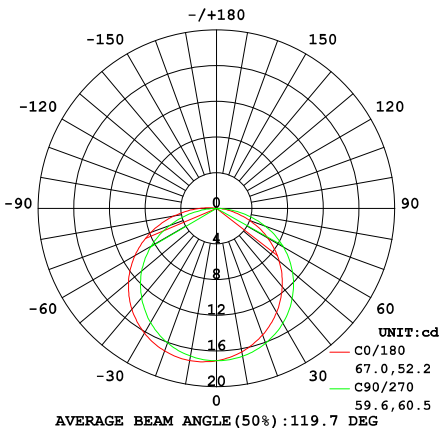

POWER DETAILS

Watts Per Foot	3.0 W/Ft
Voltage	120 VDC
Wire Size	18 AWG
Lead	1.64' Feet / 4.92' Feet
Jumper	9" Inch Min., 48" Max.
Lumen Maintenance	50,000 Indoor Hours 36,000 Outdoor Hours
Warranty	5 Years Indoors, 3 Year Outdoors
Certifications	ETL Listed

Beam Angle	120°
CCT Binning SDCM	3-Step MacAdam
Lumens / Ft	14 - 83
Efficacy (L/W)	3 - 28

CCT	Lumens/Ft	Efficacy	Peak Wave Length (nm)	FWHM (nm)
RED	14	5	657	82
GREEN	83	28	502	43
BLUE	10	3	460	24
AMBER	57	19	620	102
PINK	47	16	-	-

Nova Flex LED, LLC retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Dec.05.23.10:06

800.595.6302

novaflexled.com