

# ORDER GUIDE - SIDE BEND STATIC WHITE

## 120V 4.2W | NF-SBD-SWH




PART NUMBER:

Series	Family	Environment	Voltage	Bend	Kelvin
NF/SP	NEON	O	120V	SB	2700K
					3000K
					3500K
					4000K
					5000K
					6500K

**Notes:**

- Great for long runs up to 164' to outline buildings, coves or landscape applications.
- Custom finish with 3-5 week lead-time for orders up to 1000 ft. ; 5-7 weeks for larger orders.
- Warranty is 4 years indoors and 2 years outdoor for applications requiring more than 16 hours of daily use.
- Indoor and Outdoor rated.
- ETL Listed with hardwire or plug option.


### ENVIRONMENT AND DIMENSIONS (INCHES UNLESS SHOWN)

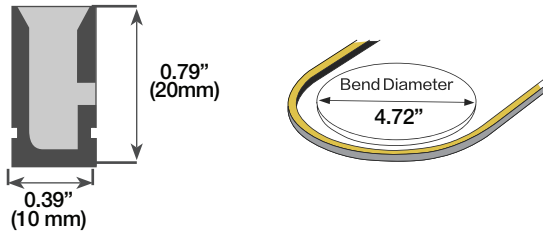

### PHYSICAL

Environment	Damp (Dust/splash proof)
Ambient Temp	-4° to 113°F (-20° to 45°C)
Cut Length	3.94" Inches (10 cm)
Min. Bend Diameter	4.72" Inches (11.99 cm)
Max Run	164' Feet (49.99 m)
Dimensions	W: 0.39" Inches (9.9 mm) H: 0.79" Inches (20.06 mm)

### ILLUMINATION DETAILS @ 3000K

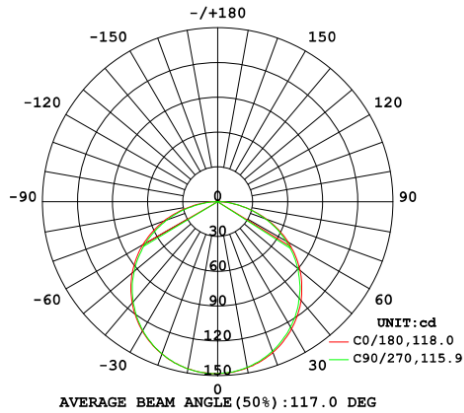

### POWER DETAILS

Watts Per Foot	4.2 W/Ft
Voltage	120 VDC
Wire Size	18 AWG
Lead	1.64' Feet / 4.92' Feet
Jumper	9" Inch Min., 48" Max.
Lumen Maintenance	50,000 Indoor Hours 36,000 Outdoor Hours
Warranty	5 Years indoor, 3 Years outdoor
Certifications	ETL Listed

CCT	Lumens/Ft	CRI Ra	CRI R9	TM30 Rf	TM30 Rg
2700K	264	82	5	84	95
3000K	287	82	4	84	95
3500K	291	82	5	84	95
4000K	298	82.8	9	84	95
5000K	296	81.9	4	83	94
6500K	286	82.7	10	82	95

Beam Angle	120°
CRI/R9 at 3000K	82 / 4
Rf/Rg at 3000K	84 / 95
CCT Binning SDCM	3-Step MacAdam
Lumens / Ft	264 - 298
Efficacy (L/W)	63 - 71

Nova Flex LED, LLC retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Jan.11.24.07:12

800.595.6302

novaflexled.com