



ORDER GUIDE - POWER & CONTROL

DMX DECODER | 480W



PART NUMBER



Notes:

POWER

Voltage Range	12 ~ 24 VDC
Current	5A x 4CH Max. 20 Amps
Voltage	12 ~ 24VDC
Input Signal	DMX512, RDM
Input Voltage	12 - 25 VDC
Output Voltage	12 - 24VDC
Current	5A x 4CH Max. 20 Amps
Output Power	480 W Max
DMX512 Socket	RJ45


PROTECTION

Protection	Short Circuit / Over Load Recover Automatically
Protection Rating	UL 1310, Class 2, IP67
Operating Temp	-22 to 149° F (-30° to 65° C)
Storage Temp	-40° ~ 176° F (-40° ~ 80° C) 10 ~ 95% HC
Warranty	2 - 5 Years (based on warranty of linear product purchased)

To meet local / national codes, this driver may require mounting in approved UL Enclosure.

PHYSICAL

Weight | 10.9 oz

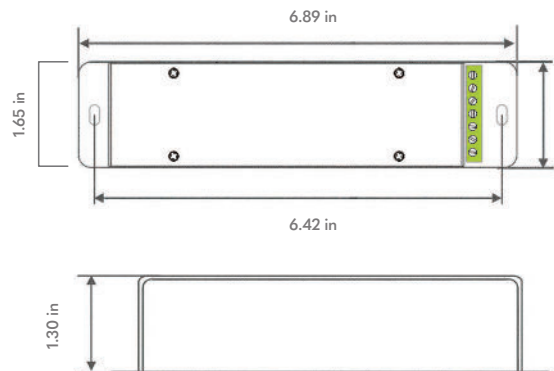

Nova Flex LED, LLC. retains the right to modify the design of our products at any time as part of the company's continual product improvement program.

PROJECT

FIXTURE

PHASE

DATE

Rev: Oct.18.23/01:10

800.595.6302

novaflexled.com