


# ORDER GUIDE - POWER & CONTROL

## MULTI-CHANNEL DIM | 288W



### PART NUMBER

POWER SUPPLY					
Series	Family	Type	Wattage	Voltage	Dimmable
NF	PS	MAXX	288W	24V	0/10V

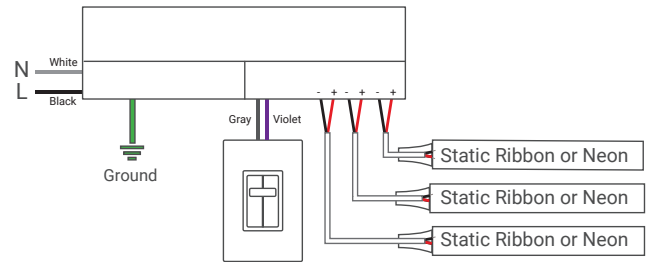

Notes:

### INPUT

Voltage Range	100 ~ 277 VAC
Frequency	47 ~ 63 Hz
Current	3.A Max
Inrush Current	35A Max / 115 VAC
Efficiency	> 87%
Power Factor	0.99 / 120 VAC
THD	< 20%

### PROTECTION

Short Current	Yes
Over Temperature	Yes; Hiccup Mode
Over Load	Yes; CC Mode
Warranty	2 - 5 Years (based on warranty of linear product purchased)

### OUTPUT

Voltage	24VDC
Current	20 A
Line Regulation	0.5%
Load Regulation	1%


### ENVIRONMENT

Protection Rating	UL Listed, UL 8750, UL 1310 IP65
Operating Temp	-40° to 140° F (-40° to 60° C)
Storage Temp	-40° ~ 176° F (-40° ~ 80° C) 10 ~ 95% HC

To meet local / national codes, this driver may require mounting in approved UL Enclosure.

### PHYSICAL

Weight | 77.60 oz

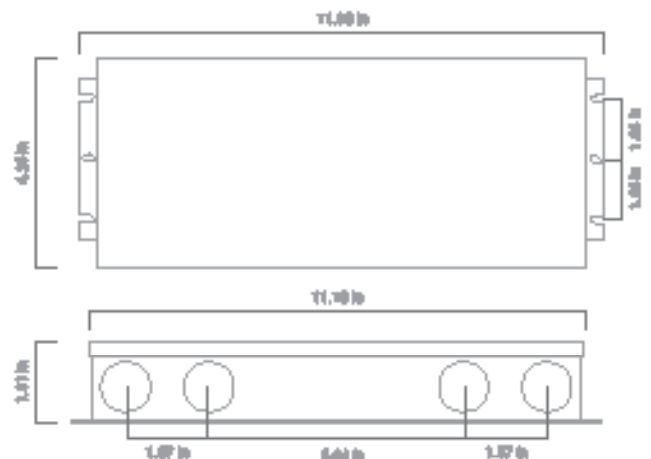

Nova Flex LED, LLC. retains the right to modify the design of our products at any time as part of the company's continual product improvement program.

PROJECT

FIXTURE

PHASE

DATE

Rev: Oct.17.23/19:10

800.595.6302

novaflexled.com