



# ORDER GUIDE

## NON-DIMMABLE DRIVER | 60W

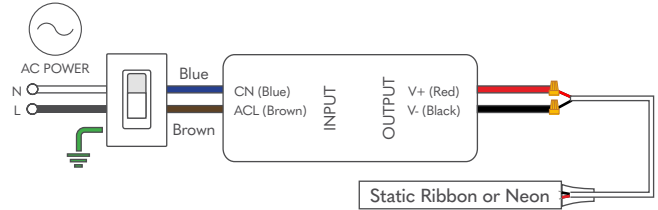

PART NUMBER



Notes:

### INPUT

Voltage Range	90 ~ 246 VAC
Frequency	47 ~ 63 Hz
Current	1.2 A / 114 VAC
Inrush Current	30 A / 115 VAC
Efficiency	86%

### PROTECTION

Over Current	110 ~ 150; Hiccup Mode
Over Voltage	27.6 ~ 32.4 V
Warranty	2 - 5 Years (based on warranty of linear product purchased)

### OUTPUT

Voltage	24VDC
Current	2.5 A
Ripple	150 mVp-p
Line Regulation	1%
Load Regulation	6%
Turn on Delay Time	50 ms/230 VAC
Optimal Load	Up to 95%


### ENVIRONMENT

Protection Rating	UL 1310, Class 2
Operating Temp	-4° to 113° F (-20° to 45° C)
Storage Temp	-40° ~ 176° F (-40° ~ 80° C) 10 ~ 95% HC

To meet local / national codes, this driver may require mounting in approved UL Enclosure.

### PHYSICAL

Weight | 14.4 oz

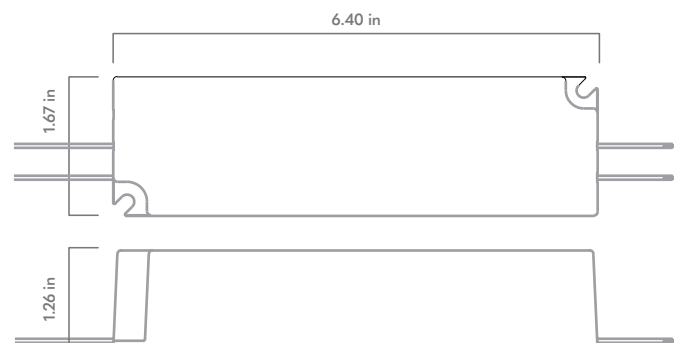

Nova Flex LED, LLC. retains the right to modify the design of our products at any time as part of the company's continual product improvement program.