ORDER GUIDE


NON-DIMMABLE DRIVER | 96W






PART NUMBER

POWER SUPPLY





INPUT

Voltage Range	120 - 277 VAC
Frequency	50 / 60 Hz
Current	0.96A Max
Inrush Current	5A Max @ 120V / 23.7A Max @ 3277V
Efficiency	> 87% Max
Power Factor	> 0.95
THD	< 20%

PROTECTION

Over Current	Yes
Over Voltage	Yes
Over Temperature	Yes; Hiccup Mode
Over Load	Yes; CC Mode
Short Circuit	Yes; Hiccup Mode
Warranty	2 - 5 Years (based on warranty of linear product purchased)

OUTPUT

Voltage	24VDC
Current	4100mA Max
Ripple	> 3%
Line Regulation	> 2%
Load Regulation	> 3%
Turn on Delay Time	> 0.3 sec
Optimal Load	Up to 95%


ENVIRONMENT

Protection Rating	UL Listed IP65
Operating Temp	-13° to 104° F (-25° to 40° C)
Max Case Temp	149° F (65° C)
Storage Temp	-40° to 185° F (-25° to 40° C)
Expected Life	50,000 Hrs
Audible Noise	> 24db Class A

PHYSICAL

30.4 oz Weight



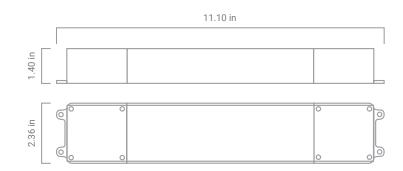

Nova Flex LED, LLC. retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT PHASE DATE **FIXTURE**

800.595.6302 novaflexled.com