

# ORDER GUIDE - DUAL BEND NEON DRGB

## NF-NEON RGB 3.0W




PART NUMBER BUILDER:

Series	Family	Environment	Bend	Voltage	Color
NF	NEON	W	DUAL	24V	RGB

Notes:

### ENVIRONMENT AND DIMENSIONS




Section	IN
A	0.59" (14.97 mm)
B	0.63" (16.0 mm)

### PHYSICAL

Environment	WET
Operating Temp	-13° to 113°F (-25° to 45°C)
Cut Length	1.97" Inches (5.00 mm)
Min. Bend Diameter	7.86" Inches (19.94 mm)
Max Run	16' Feet 4" Inches
CCT Binning	2-step MacAdam
Jumper	26.1"

### LIGHT DISTRIBUTION; RED

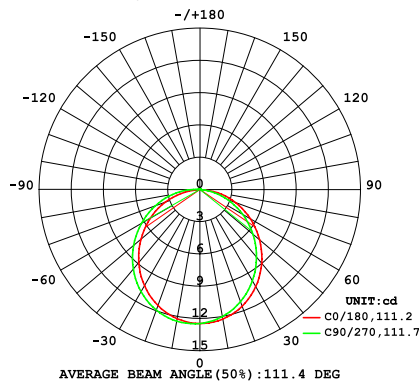

Color	Peak Wave Length (nm)	L/Ft	Efficacy
Red	629	87	14.8
Green	520		26.2
Blue	462		18.2

### ELECTRICAL

Voltage	24V
Wattage	3.0W
Wire Size	22 AWG
Lead Wire	11.8" / 3.28"
Dimming	Driver Dimming OK; See Compatibility Resource Guide

### QUALITY ASSURANCE

Lumen Maintenance	54,000 Hrs
Warranty	5 years
Certifications	cULus listed

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Jan.11.24.08:08

800.595.6302

novaflexled.com