

ORDER GUIDE - POWER AND CONTROL

UNIVERSAL NON-DIM | 30W




PART NUMBER

POWER SUPPLY

Series	Family	Type	Wattage	Voltage
NF	PS	UNV	30W	24V

AC Power (L) (N)



Notes:

PHYSICAL

Voltage Range	120 ~ 277 VAC
Frequency	47 ~ 63 Hz
Current	0.5 A / 100 VAC
Inrush Current	7 A / 120 VAC 12 A / 277 VAC
Efficiency	79% @ 120 VAC 80% @ 277 VAC
Voltage	24 VDC
Current	1.25 A
Load Regulation	±1%


ENVIRONMENT

Protection Rating	cULus Listed, UL 8750, Class 2, Type HL rated, FCC
Operating Temp	-40° to 140° F (-40° to 60° C)
Storage Temp	-40° ~ 176° F (-40° ~ 80° C) 10 ~ 95% HC
Warranty	2 - 5 Years (based on warranty of ribbon/neon purchased)

To meet local / national codes, this driver may require mounting in approved UL Enclosure.

DIMENSIONS

Weight | 2.09 lbs

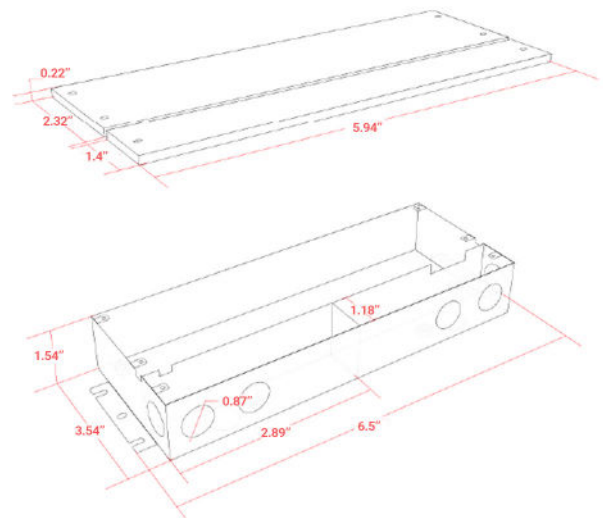

Nova Flex LED, LLC. retains the right to modify the design of our products at any time as part of the company's continual product improvement program.

PROJECT

FIXTURE

PHASE

DATE

Rev: Oct.18.23/01:10

800.595.6302

novaflexled.com