
RESOURCE GUIDE - POWER & CONTROL WALL MOUNT RGB/W DIM | \$31






WIRING

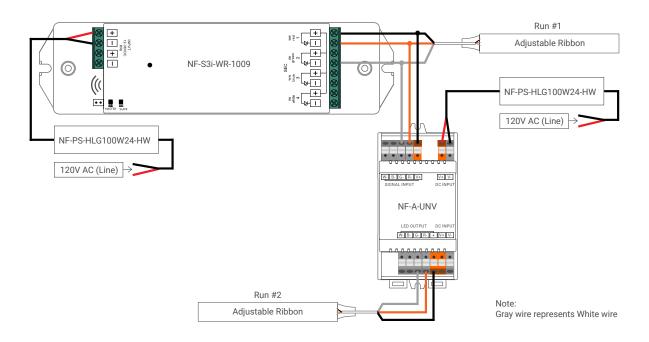

PAIRING

Remove plastic battery saver within the controller to operate. Once NF-S3i-WR-1009 is discoverable, press the ON button on controller (flash indicates pairing successful)





Nova Flex LED, LLC. retains the right to modify the design of our products at any time as part of the company's continual product improvement program.

PROJECT FIXTURE PHASE DATE

Rev: Oct.18.23/18:10 **800.595.6302** novaflexled.com

RESOURCE GUIDE - POWER & CONTROL WALL MOUNT RGB/W DIM | S3I





OPERATION

PROJECT

Controlling Zones - Up to 4 different ZONES Scene - NO SCENES

Color Change - RGB

Press and Hold R/G/B Cycle button (only

goes one direction).

Press R/G/B Cycle (once fast to change to Preset SOLID Colors (repeat to cycle through all Preset Colors).

Color Change - White

Press the "W" once fast to Turn ON WHITE (Press W once fast again to Turn OFF)

To change to solely WHITE, DOUBLE TAP R/G/B Cycle button TWICE FAST to turn OFF colors. Then press W once fast to turn ON WHITE (press W once fast again to turn OFF)

Brightness - RGB

Press and hold Sun - (Top Left) to adjust brightness (release button and press and hold again to go opposite direction). Also works when mixing R/G/B/W colors!

Brightness - White

Press and hold W to adjust brightness (release button and press and hold again to go opposite direction). Also works when mixing R/G/B/W colors!

Nova Flex LED, LLC. retains the right to modify the design of our products at any time as part of the company's continual product improvement program

FIXTURE

PHASE 800.595.6302 novaflexled.com