



- Introducing Nova Flex's new, robust and feature-rich side-bend Mini Neon 2.0!
  - *Spec-grade, flexible, flat-top silicone neon, with 5 year warranty*
  - *Ideal size, shape and brightness for optimal design flexibility*
- Higher output static whites (3X + vs. original Nova Flex mini neon) available in six color temps
- In-house custom injection molding produces exceptional finishing of IP67 neon with a SHORT, 5-10 day lead-time
- [IP68 available via special order](#)
- Salt and UV / anti-yellowing resistant; IK08 protection
- [Lower output CRI90 options available via special order](#)

## PERFORMANCE (CRI80)

SKU	CCT	L/ft	EFFICACY (L/W)	LED/M
NF-M2N-WT-24V-22K/80	2200	98	26.8	72
NF-M2N-WT-24V-27K/80	2700	110	30.1	72
NF-M2N-WT-24V-30K/80	3000	122	33.3	72
NF-M2N-WT-24V-35K/80	3500	122	33.3	72
NF-M2N-WT-24V-40K/80	4000	122	33.3	72
NF-M2N-WT-24V-57K/80	5700	122	33.3	72

Lumen values can vary +/- 10%

[\\*see page 2 for CRI90 options](#)


## ELECTRICAL (CRI80 & CRI90)

Power	3.7 w/ft (CRI80 & CRI90)
Voltage	24 VDC
Wire Size	18 AWG, 2-wires (RED = 24V, BLACK = ground)
Lead	11.8"
Jumper	11.8"
Control	0-10V, MLV, ELV Triac, PWM, and External Controller

## QUALITY ASSURANCE

CCT Binning SDCM	Neon <5 / LED <2.3
Warranty	5 Years
Lumen Maintenance	50,000 hrs
Certifications	cULus Listed

## LIGHT DIST (CRI80 3000K)

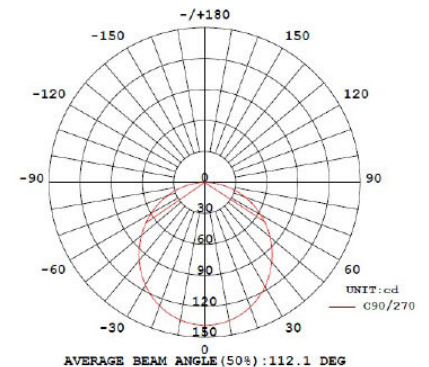

Beam Angle (CRI80 & CRI90)



### CRI80

CRI/R9 at 3000K 85.4 / 15

Rf/Rg at 3000K 85 / 94


### CRI90 (special order)

CRI/R9 at 3000K 98.6 / 97

Rf/Rg at 3000K 96 / 101

## PHYSICAL

Ambient Temp	-40° to 131°F
Environment	Wet (IP67)
Mounting	Straight Aluminum Channel, or Clip
Cut Length	3.28"
Min. Bend Diameter	4.72"
Max Run	23.51' (CRI80 & CRI90)
Dimensions	width 0.45" height 0.83"

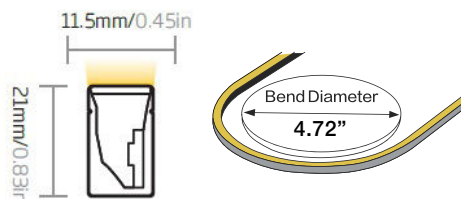


[DOWNLOAD PHOTOMETRICS](#)


## PERFORMANCE (CRI90)

SKU	CCT	L/ft	EFFICACY (L/W)	LED/M
<a href="#">NF/SP-M2N-WT-24V-27K/90</a>	2700	85	23.2	72
<a href="#">NF/SP-M2N-WT-24V-30K/90</a>	3000	98	26.8	72
<a href="#">NF/SP-M2N-WT-24V-35K/90</a>	3500	98	26.8	72
<a href="#">NF/SP-M2N-WT-24V-40K/90</a>	4000	98	26.8	72

## LEAD WIRE ORIENTATION

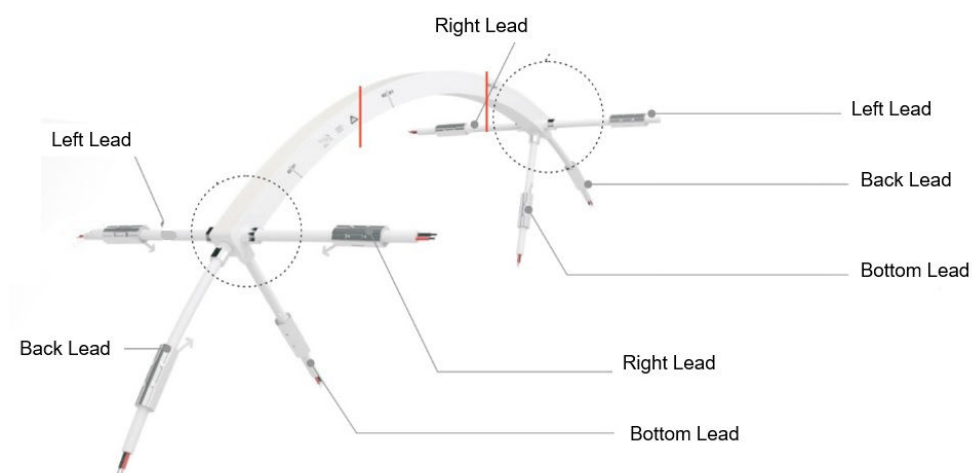


## Dimensions for Nova in-house injection molded IP67 front connectors and end cap:

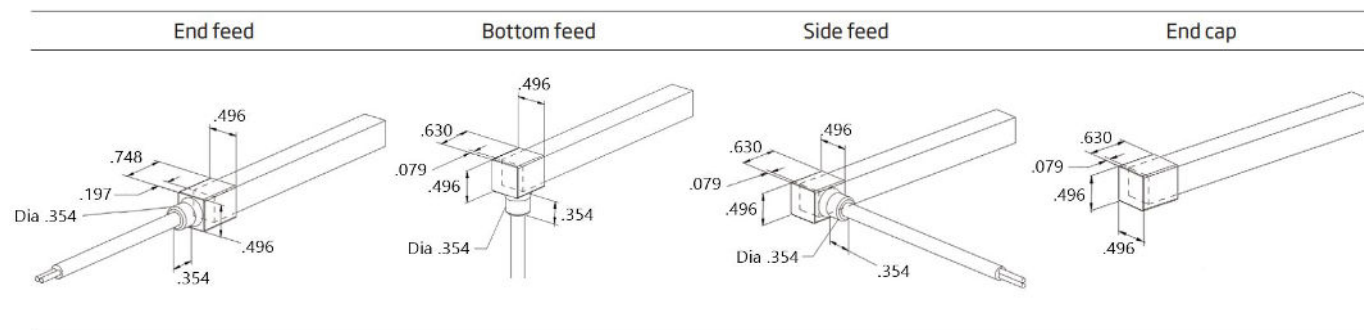



Unit: inches. Tolerance  $\pm .020$
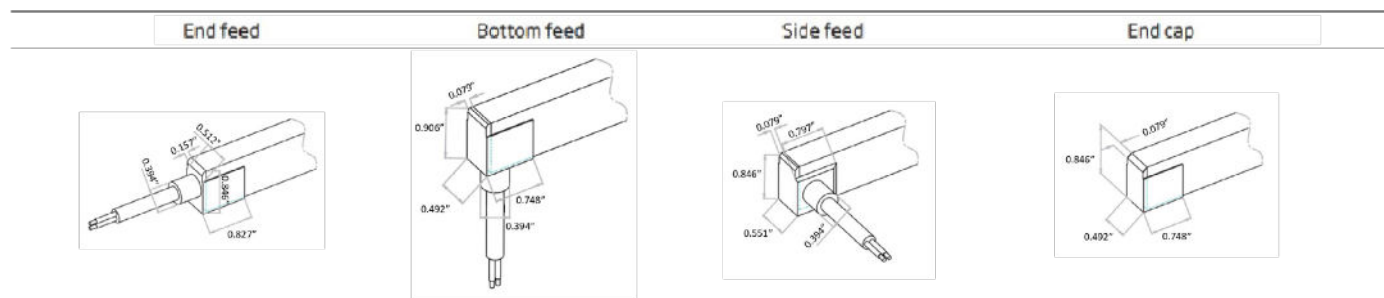
## Dimensions for special order, injection molded IP68 front connectors and end cap with a further refined finish:















Unit: inches. Tolerance  $\pm .020$

MOUNTING OPTIONS

SKU	Dimensions	Mounting
 <b>NF-CH-NEON-M2N-SR-2M</b> Silver Rigid Aluminum Profile	width: 0.63" height: 0.98" length: 2.0 meters = 6.56'	Each 2M/6.56' section of profile has ten pre-drilled holes, and includes ten screws. The molded caps used on each end for Nova in-house customization will rest outside the profile (see above for endcap dimensions). Leave a .5" gap from the edge of the channel to the edge of each molded end cap.
 <b>NF-CH-NEON-M2N-SR-CLIP</b> Silver Aluminum Clip	width: 0.63" height: 0.98" length: 0.79"	<p>This clip mounts behind the neon, with one screw (included). Always use one clip near to each end of the run (leave a .5" gap from the edge of the clip to the edge of the molded end cap). We generally recommend 7-10 clips per 3.3 feet:</p> <ul style="list-style-type: none"><li>• For ceiling installs, we recommend 10 clips.</li><li>• For wall installs, straight runs, 7-clips; for curves/shapes, wall or ceiling, use the number of clips needed to accomplish the desired shape.</li></ul>

	Product Image	Product Code	Wattage	Current/Voltage	Safety	Downloads
Universal Dim / Non-Dim		NF-PS-UNV-30W-24V Dim 0-10V, MLV, ELV TRIAC View spec sheet for all options	30W	Output Current: 1.25A Input Voltage: 100-277 VAC	UL8750 Class 2 Type HL FCC	<a href="#">SPEC SHEET</a>
		NF-PS-UNV-60W-24V Dim 0-10V, MLV, ELV TRIAC View spec sheet for all options	60W	Output Current: 2.5A Input Voltage: 100-277 VAC	UL8750 Class 2 Type HL FCC	<a href="#">SPEC SHEET</a>
		NF-PS-UNV-80W-24V Dim 0-10V, MLV, ELV TRIAC View spec sheet for all options	80W	Output Current: 3.33A Input Voltage: 100-277 VAC	UL8750 Class 2 Type HL FCC	<a href="#">SPEC SHEET</a>
		NF-PS-UNV-96W-24V Dim 0-10V, MLV, ELV TRIAC View spec sheet for all options	96W	Output Current: 4A Input Voltage: 100-277 VAC	UL8750 Class 2 Type HL FCC	<a href="#">SPEC SHEET</a>
		NF-PS-UNV-288W-24V Dim 0-10V, MLV, ELV TRIAC View spec sheet for all options	288W	Output Current: 3x4A Input Voltage: 100-277 VAC	UL8750 Class 2 Type HL FCC	<a href="#">SPEC SHEET</a>
		NF-PS-UNV-384W-24V Dim 0-10V, MLV, ELV TRIAC View spec sheet for all options	384W	Output Current: 4x4A Input Voltage: 100-277 VAC	UL8750 Class 2 Type HL FCC	<a href="#">SPEC SHEET</a>
0 - 10V Dim Only		NF-PS-MAXX-30W-24V-0/10V	30W	Output Current: 1.25A Input Voltage: 100-277 VAC	UL8750 Class 2 Type HL FCC	<a href="#">SPEC SHEET</a>
		NF-PS-MAXX-288W-24V-0/10V	288W	Output Current: 20A Input Voltage: 100-277 VAC	UL 7850 UL1310	<a href="#">SPEC SHEET</a>
		NF-PS-96W-24V-0/10V	96W	Output Current: 0.96A Max Input Voltage: 120-277 VAC	UL8750 Class 2	<a href="#">SPEC SHEET</a>
Lutron		NF-PS-L3DA-40W-24V-KL Lutron Hi-Lume 1% EcoSystem/3-Wire 24V	40W	Output Current: 3.3A Input Voltage: 120-277 VAC	UL8750 Class 2 Type TL	<a href="#">SPEC SHEET</a>
		NF-PS-L3DO-96W-24V Lutron Hi-Lume Premier 0.1% EcoSystem/3-Wire 24V Constant Voltage	96W	Output Current: 4.0A Input Voltage: 120-277VAC	UL8750 CSA250.13-14 Class 2	<a href="#">SPEC SHEET</a>

	Product Image	Product Code	Details	Downloads
S3i Series		S3i Glass Touch-Panel NF-S3i-TP-D	Required to Pair: S3i-WR-1009 Zones: 4 Power Consumption: 200ma Dimming Function: 0 - 100%	<a href="#">SPEC SHEET</a>
		S3i Hand-Held Remote NF-S3i-WC-D	Required to Pair: S3i-WR-1009 Zones: 6 Dimming Function: 0 - 100% Battery Operated: 3 AAA	<a href="#">SPEC SHEET</a>
		S3i Push Button Wall Mount NF-S3i-PB-D	Required to Pair: S3i-WR-1009 Zones: 1 Dimming Function: 0 - 100% Battery Operated: 3V (CR2025)	<a href="#">SPEC SHEET</a>
		S3i Wireless Receiver All controls above require this product NF-S3i-WR-1009	Output Power: 240 - 720w Output Current: 4 CH. 5A/CH Input: 12 - 36V DC Dimming: 0 - 100% Can pair with NF-A-UNV	<a href="#">SPEC SHEET</a>
Amplifier		Universal Amplifier NF-A-UNV	Input Voltage: 12 - 36V DC Input Signal: PWM Max Load Current: 20A (5A/4CH) Max Output Power: 240 - 720W	<a href="#">SPEC SHEET</a>

Product Image	Product Code	Dimensions
	<b>Hardwire to Female Quick Connect Adapter</b> NF-C-F	Available Lengths: 6in, 1ft, 2ft, 3ft, 4ft, 5ft, 6ft, & 10ft
	<b>Hardwire to Male Quick Connect Adapter</b> NF-C-M	Available Lengths: 6in, 1ft, 2ft, 3ft, 4ft, 5ft, 6ft, 8ft & 10ft
	<b>Male to Female Quick Connect Adapter</b> NF-C-MF	Available Lengths: 3ft, 6ft & 10ft
	<b>Y Cable 2 Male, 1 Female</b> NF-C-Y	Total Length: 20.00 in
	<b>Y Cable 4 Male, 1 Female</b> NF-C-Y-4Y	Total Length: 20.00 in
	<b>Y Cable 8 Male, 1 Female</b> NF-C-Y-8Y	Total Length: 17.25 in
	<b>Female Quick Connect to Hardwire Adapter</b> NF-C-F/HW	1.5 x 0.5 x 0.5 in
	<b>Male Quick Connect to Hardwire Adapter</b> NF-C-M/HW	1.5 x 0.5 x 0.5 in

FOR MORE  
INFORMATION  
CLICK HERE



RESOURCES

WHY NOVA FLEX

ADDITIONAL PRODUCT OPTIONS