

# ORDER GUIDE - DESIGN SERIES DIGITAL RGB

## NFDS-DPX 3.65W | NF-DRGB-48



PART NUMBER BUILDER:


Series	Family	Environment	LEDs/m	Voltage	Length	
NF	DRGB	O - DMP W - WET*	48	24V	XX RL10MT RL50MT	- Length in inches - 10 Meter Reel (DMP Only) - 50 Meter Reel (WET Only)

### Notes:

1 \*Wet is available with a lead time of 7-10 weeks

## ENVIRONMENT AND DIMENSIONS

IN INCHES UNLESS NOTED

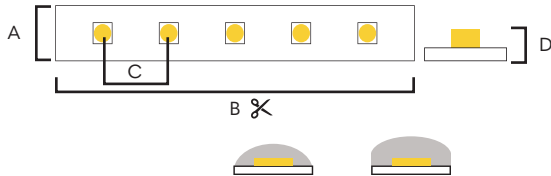

Section	Damp	Wet
A	0.47" (11.94 mm)	0.52" (13.21 mm)
B	4.91" (12.47 cm)	4.91" (12.47 cm)
C	0.61" (15.4 mm)	0.61" (15.4 mm)
D	0.12" (3.05 mm)	0.22" (5.59 mm)

## ILLUMINATION DETAILS

CCT	Lumens/Ft	Efficacy (lm/w)	Power (w/ft)	Max Run
DRGB	83	23	3.65	16.4' ft

Lumens have a tolerance of +/- 10%.

## PHYSICAL

Environment	Damp (Dust/Splash Proof) Wet (Water/ Chemical Resistant)
Operating Temp	-15° to 140°F (-25° to 60° C)
Mounting	3M Adhesive - Clips - Channels
Cut Length	4.93" In (12.52 cm) (Pixel Size / Length and Resolution also 4.93")
Bend Diameter	1.96" (50mm)

## QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
Warranty	2 Years
CCT Binning	3-Step MacAdam
Certifications	UL

## ELECTRICAL

Voltage	24V
Wire Size	20 AWG. 4 Wire
Lead	Default: 120" Inch 2" Inch (50.8 mm) Minimum 3" Inch (76.2 mm) Minimum Quick Connect: 3" - 120" Inch
Jumper	3" Inch (76.2 mm) Minimum
Dimming	Control Method: SPI, No Clock Chip Set: UCS 2903

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Mar.18.24.06:21

800.595.6302

novaflexled.com