


ORDER GUIDE - DESIGN SERIES DYNAMIC RGB

NFDS-RGB 4.9W | NF-DS-60




PART NUMBER BUILDER:

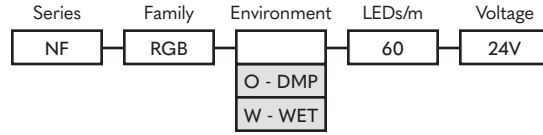

Notes:

ENVIRONMENT AND DIMENSIONS

IN INCHES UNLESS NOTED

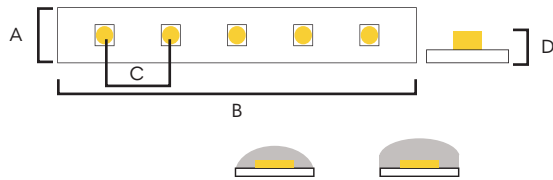

Section	Damp	Wet
A	0.47" (11.94 mm)	0.56" (14.2 mm)
B	3.91" (9.93 cm)	3.91" (9.93 cm)
C	0.43" (10.9 mm)	0.43" (10.9 mm)
D	0.12" (3.05 mm)	0.22" (5.59 mm)

ILLUMINATION DETAILS

Environment	Lumens/Ft	Efficacy (lm/w)	Max Run
RGB	116	24	16.4

Lumens have a tolerance of +/- 10%.

PHYSICAL

Environment	IP65 (Dust/Splash Proof) IP68 (Water/ Chemical Resistant)
Operating Temp	-15° to 140°F (-25° to 60° C)
Mounting	3M Adhesive - Clips - Channels
Cut Length	3.91" In (9.93 cm)

QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
Warranty	2 Years
CCT Binning	3-Step MacAdam
Certifications	UL

ELECTRICAL

Voltage	24V
Wire Size	20 AWG. 4 Wire
Power	4.9 W/Ft
Lead	Default: 120" Inch IP65: 2" Inch (50.8 mm) Minimum IP65: 3" Inch (76.2 mm) Minimum Quick Connect: 3" - 120" Inch
Jumper	IP65 & IP68: 3" Inch (76.2 mm) Minimum
Dimming	MLV 0-10V S3i Series Controller

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Oct.20.23.08:25

800.595.6302

novaflexled.com