

ORDER GUIDE - DIM TO WARM VERTICAL BEND

NF-NEON DTW VB 3.7W




PART NUMBER BUILDER:

Series	Family	Environment	Type	Bend	Voltage	Kelvin
NF	NEON	W	SQS	VB	24V	DTW

Notes:

1. Submersible available upon request with 7-10 week lead time
2. Salt and UV / Anti-yellow resistance, IK08 protection
- 3.


ENVIRONMENT AND DIMENSIONS



PHYSICAL

Environment	WET
Operating Temp	-40° to 121°F (-40° to 49°C)
Cut Length	2.46" Inches (6.25 mm)
Min. Bend Diameter	11.81" Inches (29.99 mm)
Max Run	25.83' Feet (7.62 m)
Lead Wire	1M, 3M
Jumper	11.8" Inches

LIGHT DISTRIBUTION @ 3000K

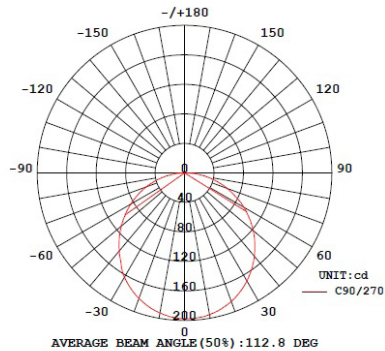

Kelvin	L/Ft	Efficacy	CRI Ra / R9	CRI Rf / Rg
3000K > 1800K	183	13	90 / 57	91 / 99

Lumen values can vary +/- 10%

ELECTRICAL

Voltage	24V
Wattage	3.7 W/ft
Wire Size	18 AWG, 2-wires
Dimming	PWM Dimming

QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
Warranty	5 years
Certifications	cULus Listed
CCT Binning	3-step MacAdam

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Jan.11.24.08:20

800.595.6302

novaflexled.com