


# ORDER GUIDE - MINI NEON 2.0

## NF-NEON SWH 3.7W




PART NUMBER BUILDER:

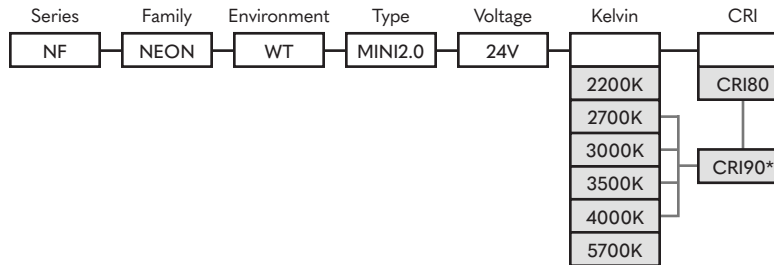

### Notes:

- CRI90 configurations require a 7-10 week lead time
- \*Special Order and Submersible available upon request with 7-10 week lead time 365 @ MOQ
- CRI90 only available with 2700K, 3000K, 3500K and 4000K

## ILLUMINATION DETAILS

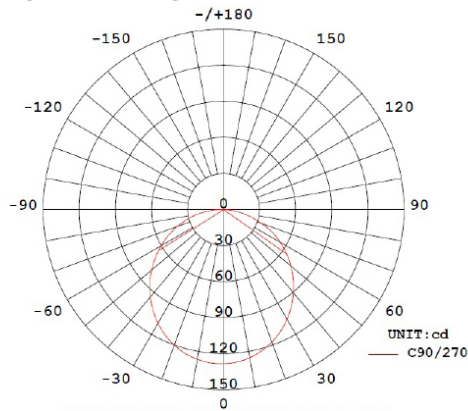

Kelvin	L/Ft CRI80	Efficacy CRI80	L/Ft CRI90	Efficacy CRI90
2200K	98	26.8	-	-
2700K	110	30.1	85	23.2
3000K	122	33.3	98	26.8
3500K	122	33.3	98	26.8
4000K	122	33.3	98	26.8
5700K	122	33.3	-	-

Lumen values can vary +/- 10%

Beam Angle	113.2°
CRI80 RA/R9 at 3000K	85.4 / 15
CRI80 Rf/Rg at 3000K	85 / 94
CRI90 RA/R9 at 3000K	98.6 / 97
CRI90 Rf/Rg at 3000K	96 / 101
CCT Binning SDCM	Neon < 5 / LED < 2.3

## ENVIRONMENT AND DIMENSIONS



## PHYSICAL

Environment	WET
Operating Temp	-40° to 131°F (-40° to 55°C)
Cut Length	3.28" Inches (8.33 cm)
Min. Bend Diameter	4.72" Inches (11.98 cm)
Max Run	26.24' Feet (7.99 m)
Lead Wire	11.8" Inches (29.97 cm)
Jumper	11.8" Inches (29.97 cm)

## ELECTRICAL

Voltage	24V
Wattage	3.7 W/ft
Wire Size	18 AWG, 2-wires (RED = 24V, BLACK = ground)
Dimming	0-10V, MLV, ELV Triac, PWM, and External Controller

## QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
Warranty	5 years
Certifications	cULus listed

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Jan.11.24.08:48

800.595.6302

novaflexled.com