

# ORDER GUIDE - SIGNATURE SERIES

## SS-WHE | WHITE HIGH EFFICIENCY



### ORDER CODE BUILDER:

Series	Family	Voltage	Wattage	Environment	Kelvin	Length	Cut Point	Type	Wire In	Wire In Length	Wire Out	Wire Out Length
SS	WHE	24										
			1.0	DRY	22	XX	- Length in inches					
			3.0	DMP	25							
			4.4		27	SFXXX	A	CLW	BE	inches	BE	inches
			5.0		30	DFXXX	B	CLB	BM		BF	
			6.0		35			PLN	NA		NA	
					41							

Assembly Builder<sup>2</sup>

EXAMPLE ORDER CODE: SS-WHE-24-1.0-DRY-22-SF90-A-CLW-BE-60-BE-5

#### Notes:

1. Tolerances are +/- 5%
2. For continuous links consult the factory
3. Values are minimums

### LENGTH - AS AN ASSEMBLY

For continuous links consult the factory

SFXXX



Single Fed - Length in Inches - 3 digits

DFXXX



Double Fed - Length in Inches - 3 digits


### WIRE IN

BE



Bare End

BM



Barrel Male


NA



None

### CUT POINT

If desired strip length is not possible, should the factory cut above or below your desired length:

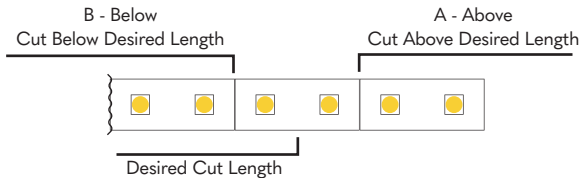

### WIRE OUT

BE



Bare End

BF



Barrel Female

NA



None

### WIRE TYPE

Wire environment will match Linear environment

CLW	Class 2 White
CLB	Class 2 Black
PLN	Plenum

### IMAGE:



Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Jun.27.24.01:31

800.595.6302

novaflexled.com