

# ORDER GUIDE - TECHNICAL INFO

## SS-TWH




**Notes:**

1. Tolerances are +/- 5%
2. For continuous links consult the factory
3. Values are minimums

### KELVIN

CCT	3.0W	4.4W	6.0W	All Wattages			
	Lumens/Ft <sup>1</sup> DRY Environment			CRI Ra <sup>3</sup>	CRI R9 <sup>3</sup>	TM30 Rf <sup>3</sup>	TM30 Rg <sup>3</sup>
2400K+3500K	66	63	61	97	96	95	103
2400K	64	63	62	97	100	83	100
3500K	69	63	62	97	100	98	100

### ENVIRONMENT AND DIMENSIONS

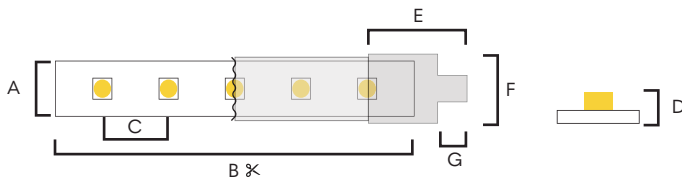

Section	Dry	Damp
A	10mm	12.1mm
B	33.3mm	33.3mm
C	4.2mm	4.2mm
D	1.85mm	3.80mm
E	-	8.14mm
F	-	14.2mm
G	-	3.18mm

### PHYSICAL

Environment	Dry (Indoor only) Damp (Dust/splash proof)	
IP Rating	Tested at IP20, IP67	
Operating Temp	0° to 140°F (-25° to 60°C)	
Cut Length	1.31" (33.3 mm)	
Min. Bend Diameter	Dry: 0.79" Inches (2 cm) Damp: 1.18" Inches (3 cm)	
Max Run	1.0W	96' Feet (29.26 m)
	3.0W	32' Feet (9.75 m)
	4.4W	21.8' Feet (6.64 m)
	5.0W	19.2' Feet (5.85 m)
	6.0W	16.0' Feet (4.87 m)

### ELECTRICAL

Voltage	24V - Dimmable
Wire Size (minimum)	20 AWG. 2 Conductor
Lumen Maintenance	50,000 Hrs
Warranty	Dry: 7 Years Damp: 5 years
CCT Binning	< 2-step MacAdam
Certifications	cULus   Closet Rated   JA8/T24 Compliant

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Jun.14.24.02:23

800.595.6302

novaflexled.com