

SPEC SHEET - TECHNICAL INFO


PRO SERIES STATIC WHITE



KELVIN

CCT	1.0W	3.0W	6.0W	1.0W	3.0W	6.0W	All Wattages - Minimums			
	Lumens/Ft ¹ IP20			Lumens/Ft ¹ IP67			CRI Ra ³	CRI R9 ³	TM30 Rf ³	TM30 Rg ³
2700K	82	246	474	68	205	394	95	85	94	100
3000K	87	262	502	73	219	421	95	85	94	100
3500K	87	262	502	73	219	421	95	85	95	100
4000K	92	273	547	77	230	454	95	85	95	100

ENVIRONMENT AND DIMENSIONS

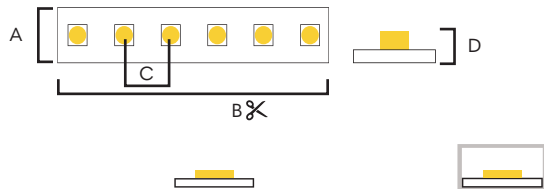

Section	IP20	IP67
A	0.39" (10 mm)	0.47" (12.1 mm)
B ³	0.98" (25 mm)	0.98" (25 mm)
C	0.16" (4.16 mm)	0.16" (4.16 mm)
D	0.05" (1.4 mm) +/- 0.3 mm	0.16" (4.2 mm) +/- 0.3 mm

IMAGE



PHYSICAL

Environment	IP20 (Dust/splash proof) IP67 (Water/chemical resistant)	
Ambient Temp	IP20: -15° to 140°F (-25° to 60°C) IP67: -15° to 140°F (-25° to 60°C)	
Cut Length	0.98" Inches (25mm)	
Min. Bend Diameter	IP20: 1.18" Inches (30 mm) IP67: 1.96" Inches (50 mm)	
Max Run	1.0W	95.1' Feet (29 m)
	3.0W	31.8' Feet (9.7 m)
	4.4W	22' Feet (6.7 m)
	6.0W	16.1' Feet (4.9 m)

ELECTRICAL

Voltage	24V - Dimmable
Wire Size (minimum)	20 AWG. 2 Conductor/Wire
Lumen Maintenance	50,000 Hrs
Warranty	4 Years
Certifications	cULus
Dimming Type	PWM / PFM IEEE PAR1789 No Effect Level Green for Flicker when used with Nova Flex drivers and Dimming modules.
Dimming Control	0-10V MLV / ELV DALI DMX

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Sep.18.24.03:10

800.595.6302

novaflexled.com