


# ORDER GUIDE - MINI NEON 2.0 STATIC COLOR

## NF-NEON STC 2.4W




PART NUMBER BUILDER:

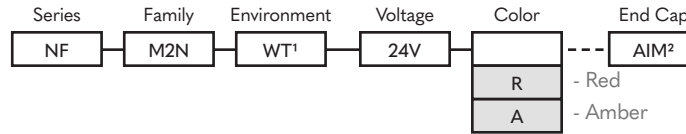

**Notes:**

1. IP67 finished with our in-house custom injection molding
2. Refined finish IP68 available upon request with 7-10 week lead time
3. Salt and UV resistant (Anti-yellow), IK08 protection


### DIMENSIONS



### PHYSICAL

Environment	IP67
Ambient Temp	-40° to 131°F (-40° to 55°C)
Cut Length	4.92" Inches (12.49 cm)
Min. Bend Diameter	4.72" Inches (11.98 cm)
Bend Direction	Side Bend
Max Run	39.77' Feet (12.12 m)
Lead Wire	11.8" Inches (29.97 cm)
Jumper	11.8" Inches (29.97 cm)

### ILLUMINATION DETAILS; RED

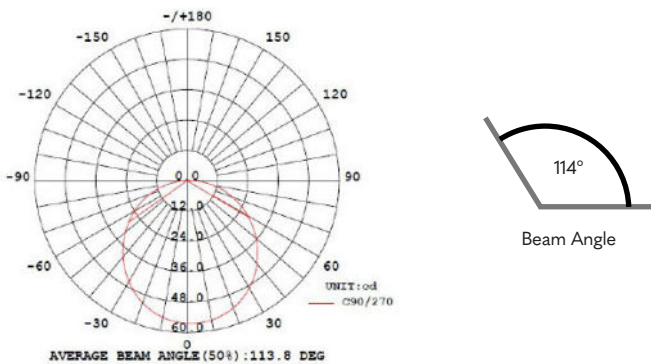

### ELECTRICAL

Voltage	24V
Wattage	2.4 W/Ft
Wire Size	18 AWG, 2-wires (RED = 24V, BLACK = ground)
Dimming	PWM / PFM   IEEE PAR1789 No Effect Level Green for Flicker when used with Nova Flex drivers and Dimming modules.
Dimming Control	0-10V   MLV / ELV   DALI   DMX

### QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
Warranty	7 years
Certifications	cULus listed

Color	Peak Wave Length (nm)	FWHM (nm)	Output L/Ft	Efficacy L/W
Red	631.0	17.5	40	16.4
Amber	593.0	14.4	40	16.4

Lumen values can vary +/- 10%

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Nov.08.24.05:14

800.595.6302

novaflexled.com