

ORDER GUIDE - MINI NEON 2.0 STATIC WHITE

NF-NEON SWH 3.7W 80CRI




PART NUMBER BUILDER:

Series	Family	Environment	Voltage	Kelvin / CRI	End Cap
NF	M2N	WT ¹	24V		AIM ²
				22K/80	
				27K/80	
				30K/80	
				35K/80	
				40K/80	
				57K/80	

Notes:

1. IP67 finished with our in-house custom injection molding
2. Refined finish IP68 available upon request with 7-10 week lead time
3. Salt and UV resistant (Anti-yellow), IK08 protection


DIMENSIONS



PHYSICAL

Environment	IP67
Ambient Temp	-40° to 131°F (-40° to 55°C)
Cut Length	3.28" Inches (8.33 cm)
Min. Bend Diameter	4.72" Inches (11.98 cm)
Bend Direction	Side Bend
Max Run	26.24' Feet (7.99 m)
Lead Wire	11.8" Inches (29.97 cm)
Jumper	11.8" Inches (29.97 cm)

LIGHT DISTRIBUTION; 3000K CRI80

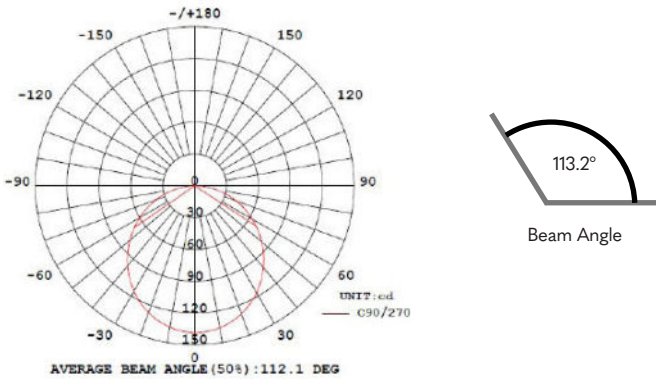

ELECTRICAL

Voltage	24V
Wattage	3.7 W/ft
Wire Size	18 AWG, 2-wires (RED = 24V, BLACK = ground)
Dimming	PWM / PFM IEEE PAR1789 No Effect Level Green for Flicker when used with Nova Flex drivers and Dimming modules.
Dimming Control	0-10V MLV / ELV DALI DMX

QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
Warranty	7 years
Certifications	cULus listed

Kelvin	Output L/Ft	Efficacy L/W	CRI Ra / R9	CRI Rf / Rg
2200K	98	26.8	-	-
2700K	110	30.1	-	-
3000K	122	33.3	85.4 / 15	85 / 94
3500K	122	33.3	-	-
4000K	122	33.3	-	-
5700K	122	33.3	-	-

Lumen values can vary +/- 10%

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program