

# ORDER GUIDE - MINI NEON 2.0

## NF-NEON TWH 3.7W




PART NUMBER BUILDER:



**Notes:**

1. IP67 finished with our in-house custom injection molding with 7-10 week lead time
2. Refined finish IP68 available upon request with 7-10 week lead time
3. Salt and UV resistant (Anti-yellow), IK08 protection


### DIMENSIONS



### PHYSICAL

Environment	IP67
Ambient Temp	-40° to 131°F (-40° to 55°C)
Cut Length	3.28" Inches (8.33 cm)
Min. Bend Diameter	4.72" Inches (11.98 cm)
Bend Direction	Side Bend
Max Run	26.24' Feet (7.99 m)
Lead Wire	11.8" Inches (29.97 cm)
Jumper	11.8" Inches (29.97 cm)

### LIGHT DISTRIBUTION; 3496K CRI80

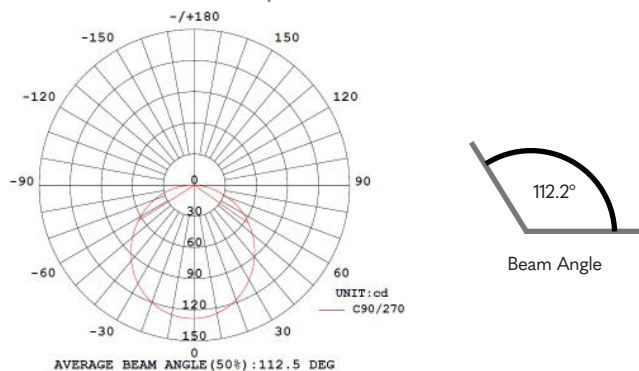

### ELECTRICAL

Voltage	24V
Wattage	3.7 W/ft
Wire Size	20AWG, 3-wire R = 24V B = cool Y = warm
Dimming	PWM / PFM   IEEE PAR1789 No Effect Level Green for Flicker when used with Nova Flex drivers and Dimming modules.
Dimming Control	0-10V   DALI   DMX

### QUALITY ASSURANCE

CCT	2200K - 5700K
CRI Ra / R9 at 2200K	85.5 / 87
CRI Rf / Rg at 2200K	85 / 93
Output L/Ft	43-52
Efficacy L/W	11.8 - 14.2

Lumen values can vary +/- 10%

Lumen Maintenance	50,000 Hrs
Warranty	5 years
Certifications	cULus listed

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program