

# ORDER GUIDE - FLEX LINE STATIC COLOR

## 120V FLEX LINE STC 2.8W




PART NUMBER:

Series	Family	Environment	LEDs/M	Voltage	Color
NF	LINE2	O	80	120V	
					RD - Red
					PK - Pink
					BL - Blue
					GR - Green
					YL - Yellow

**Notes:**

- All configurations require a 7-9 week lead time, minimum order quantity is 164' feet.
- This product is not field trimmable.


### DIMENSIONS (INCHES UNLESS SHOWN)

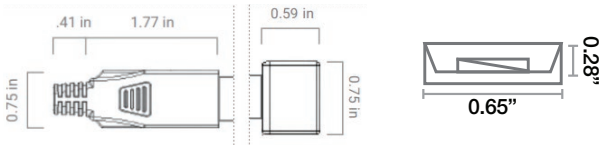

### PHYSICAL

Environment	IP65
Ambient Temp	-4° to 113°F (-20° to 45°C)
Cut Length	4" Inches (10.16 cm)
Min. Bend Diameter	3.94" Inches (Top Vertical Bend Only)
Max Run	164' Feet (49.98 m)
Dimensions	W: 0.65" Inches (16.5 mm) H: 0.28" Inches (7.11 mm)

### ILLUMINATION DETAILS (RED)

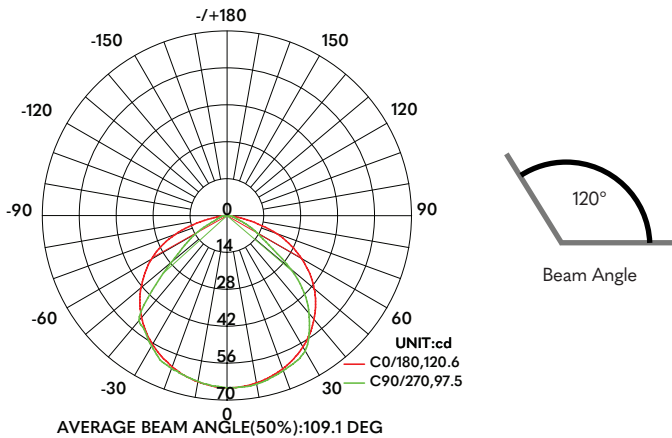

### ELECTRICAL

Watts Per Foot	2.8 W/Ft
Voltage	120 VDC
Wire Size	18 AWG, 2 Wire
Lead	1.64' Feet or 4.92' Feet
Jumper	3" Inch Min / 48" Inch Max
Dimming	Phase-cut/triac
Dimming Control	Dimmers Confirmed to be Compatible: Take care not to exceed the dimmer's power rating, recommended max run lengths noted below: Triac, Lutron DVCL-153P (max 133') Triac, Lutron DVELV-300P (max 66') Triac, Lutron DVLV-10P (all lengths, up to 164' max run of strip)

Color	Output L/Ft	Efficacy L/W
RED	49	18
PINK	148	53
BLUE	39	13
GREEN	279	101
YELLOW	170	58

Lumen values can vary +/- 10%

### QUALITY ASSURANCE

Lumen Maintenance	50,000 Indoor Hours 36,000 Outdoor Hours
Warranty	5 Years Indoor, 3 Years Outdoor *For 16+ hour per day applications
Certifications	*4 Years Indoor, 2 Years Outdoor ETL Listed

Nova Flex LED, LLC retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Dec.19.24.05:59

800.595.6302

novaflexled.com