


# ORDER GUIDE - FLEX LINE STATIC COLOR

## 120V FLEX LINE STC 2.9W




PART NUMBER:

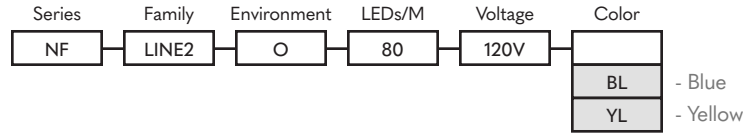

- Notes:**
- All configurations require a 7-9 week lead time.
  - Minimum Order Quantity is 164' Feet


### DIMENSIONS (INCHES UNLESS SHOWN)

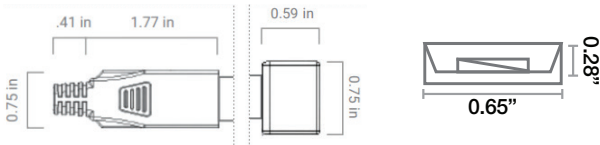

### PHYSICAL

Environment	Damp (IP65)
Ambient Temp	-4° to 113°F (-20° to 45°C)
Cut Length	4" Inches (10.16 cm)
Min. Bend Diameter	≥3.94" Inches (Top - Vertical Bend)
Max Run	164' Feet (49.98 m)
Dimensions	W: 0.65" Inches (16.5 mm) H: 0.28" Inches (7.11 mm)

### ILLUMINATION DETAILS

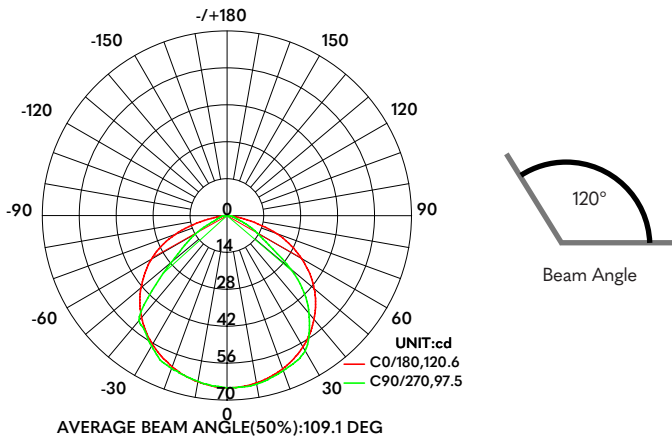

CCT	Output L/Ft	Efficacy L/W
BLUE	39	13
YELLOW	170	58

### ELECTRICAL

Watts Per Foot	2.9 W/Ft
Voltage	120 VDC
Wire Size	18 AWG, 2 Wire
Lead	1.64' Feet or 4.92' Feet
Jumper	3" Inch Min / 48" Inch Max
Dimming	PWM / PFM   IEEE PAR1789 No Effect Level Green for Flicker when used with Nova Flex drivers and Dimming modules.
Dimming Control	0-10V   MLV / ELV   DALI   DMX

### QUALITY ASSURANCE

Lumen Maintenance	50,000 Indoor Hours 36,000 Outdoor Hours
Waranty	3 Years
Certifications	ETL Listed

Nova Flex LED, LLC retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Nov.07.24.07:59

800.595.6302

novaflexled.com