

ORDER GUIDE - SIDE BEND FLICKER FREE 120V FLICKER FREE SWH 3.6W




PART NUMBER:

Series	Family	Environment	Voltage	Bend	Kelvin	Flicker Free
NF	NEON	O	120V	SB	2700K 3000K 3500K 4000K 5000K 6500K	FF

Notes:

1. This product is Non-Dimmable.
2. Lead-time for custom finish on all orders is 4-6 weeks


DIMENSIONS (INCHES UNLESS SHOWN)

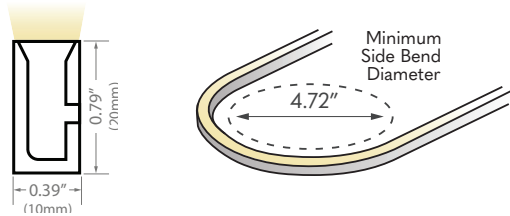

PHYSICAL

Environment	IP65
Ambient Temp	-4° to 113°F (-20° to 45°C)
Cut Length	12" Inches (30.48 cm)
Min. Bend Diameter	4.72" Inches (11.99 cm)
Max Run	82' Feet (24.99 m)
Dimensions	W: 0.39 Inches (10 mm) H: 0.79 Inches (20 mm)

ILLUMINATION DETAILS; 3000K

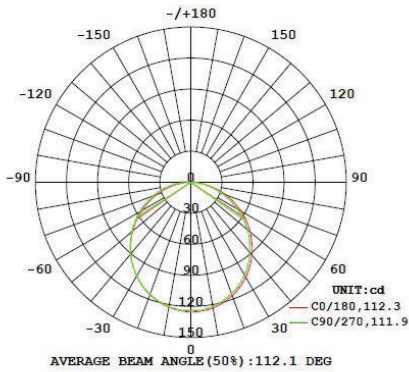

ELECTRICAL

Watts Per Foot	3.6 W/Ft
Voltage	120 VDC
Wire Size	18 AWG
Lead	1.64' Feet or 4.92' Feet
Jumper	9" Inch Min / 48" Inch Max
Dimming	Non-Dimming
Flicker Percentage	0.12
Flicker Index	0.03
Flicker Frequency	1 Hz

QUALITY ASSURANCE

Lumen Maintenance	50,000 Indoor Hours 36,000 Outdoor Hours
Warranty	5 Years Indoor, 3 Years Outdoor *For 16+ hour per day applications *4 Years Indoor, 2 Years Outdoor
Certifications	ETL Listed

CCT	Output L/Ft	Efficacy L/W	CRI Ra	CRI R9	TM30 Rf	TM30 Rg
2700K	101	28	-	-	-	-
3000K	107	30	92	61	90	99
3500K	108	30	-	-	-	-
4000K	113	31	-	-	-	-
5000K	113	30	-	-	-	-
6500K	109	30	-	-	-	-

Lumen values can vary +/- 10%

Nova Flex LED, LLC retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Dec.19.24.05:42

800.595.6302

novaflexled.com