

ORDER GUIDE - SIDE BEND STATIC WHITE

120V SIDE BEND SWH 4.2W



PART NUMBER:


Series	Family	Environment	Voltage	Bend	Kelvin
NF	NEON	O	120V	SB	
					2700K
					3000K
					3500K
					4000K
					5000K
					6500K

Notes:

1. Lead-time for custom finish on all orders is 4-6 weeks.

DIMENSIONS


(INCHES UNLESS SHOWN)

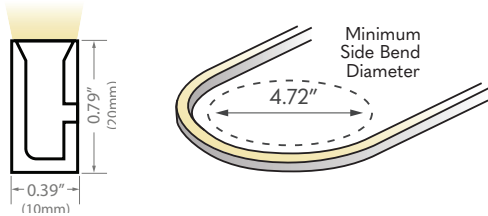

PHYSICAL

Environment	IP65
Ambient Temp	-4° to 113°F (-20° to 45°C)
Cut Length	3.94" Inches (10 cm)
Min. Bend Diameter	4.72" Inches (11.99 cm)
Max Run	164' Feet (49.99 m)
Dimensions	W: 0.39 Inches (10 mm) H: 0.79 Inches (20 mm)

ILLUMINATION DETAILS @ 3000K

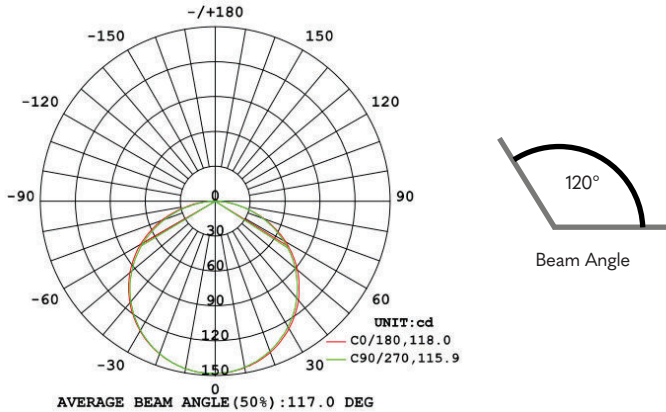

POWER DETAILS

Watts Per Foot	4.2 W/Ft
Voltage	120 VDC
Wire Size	18 AWG
Lead	1.64' Feet or 4.92' Feet
Jumper	3" Inch Min / 48" Inch Max
Dimming	Phase-cut/triac
Dimming Control	Dimmers Confirmed to be Compatible: Take care not to exceed the dimmer's power rating, recommended max run lengths noted below: Triac, Lutron DVCL-153P (max 133') Triac, Lutron DVELV-300P (max 66') Triac, Lutron DVLV-10P (all lengths, up to 164' max run of strip)

CCT	Output L/Ft	Efficacy L/W	CRI Ra	CRI R9	TM30 Rf	TM30 Rg
2700K	264	63	-	-	-	-
3000K	287	68	82	4	82	95
3500K	291	69	-	-	-	-
4000K	298	71	-	-	-	-
5000K	296	70	-	-	-	-
6500K	286	68	-	-	-	-

Lumen values can vary +/- 10%

QUALITY ASSURANCE

Lumen Maintenance	50,000 Indoor Hours 36,000 Outdoor Hours
Warranty	5 Years Indoor, 3 Years Outdoor *For 16+ hour per day applications
Certifications	ETL Listed

Nova Flex LED, LLC retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Dec.19.24.09:40

800.595.6302

novaflexled.com