

ORDER GUIDE - TOP BEND FLICKER FREE 120V FLICKER FREE SWH 3.6W



PART NUMBER:


Series	Family	Environment	Voltage	Bend	Kelvin
NF	NEON	O	120V	TB	2700K
					3000K
					3500K
					4000K
					5000K
					6500K

Notes:

1. This product is Non-Dimmable.
2. Lead-time for custom finish on all orders is 4-6 weeks

DIMENSIONS


(INCHES UNLESS SHOWN)

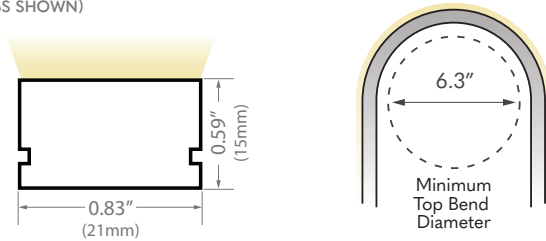

PHYSICAL

Environment	IP65
Ambient Temp	-4° to 113°F (-20° to 45°C)
Cut Length	12" Inches (30.48 cm)
Min. Bend Diameter	6.3" Inches (16 cm)
Max Run	82' Feet (24.99 m)
Dimensions	W: 0.83" Inches (21.08 mm) H: 0.59" Inches (14.99 mm)

ILLUMINATION DETAILS @ 3000K

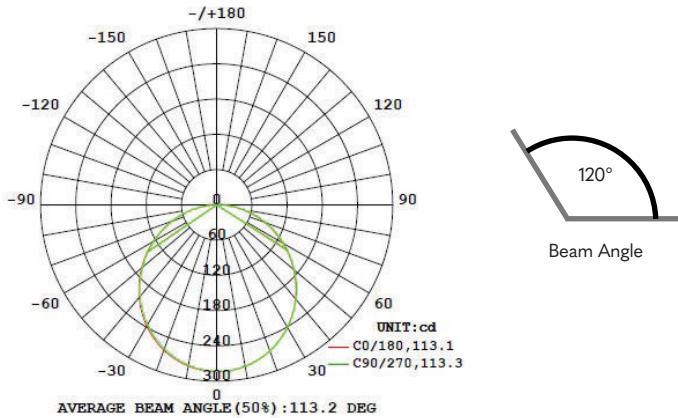

POWER DETAILS

Watts Per Foot	3.6 W/Ft
Voltage	120 VDC
Wire Size	18 AWG
Lead	1.64' Feet or 4.92' Feet
Jumper	9" Inch Min / 48" Inch Max
Dimming	Non-Dimming
Flicker Percentage	0.12
Flicker Index	0.03
Flicker Frequency	1 Hz

QUALITY ASSURANCE

Lumen Maintenance	50,000 Indoor Hours 36,000 Outdoor Hours
Warranty	5 Years Indoor, 3 Years Outdoor *For 16+ hour per day applications *4 Years Indoor, 2 Years Outdoor
Certifications	ETL Listed

CCT	Output L/Ft	Efficacy L/W	CRI Ra	CRI R9	TM30 Rf	TM30 Rg
2700K	230	64	-	-	-	-
3000K	238	66	92	64	91	99
3500K	238	66	-	-	-	-
4000K	250	69	-	-	-	-
5000K	250	69	-	-	-	-
6500K	250	69	-	-	-	-

Lumen values can vary +/- 10%

Nova Flex LED, LLC retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Dec.19.24.05:40

800.595.6302

novaflexled.com