

ORDER GUIDE - TOP BEND STATIC COLOR

120V TOP BEND STC 3.0W



PART NUMBER:



Series	Family	Environment	Voltage	Bend	Color
NF	NEON	O	120V	TB	
					R - Red
					G - Green
					B - Blue
					A - Amber
					P - Pink

Notes:

1. Lead-time for custom finish on all orders is 4-6 weeks.

DIMENSIONS



(INCHES UNLESS SHOWN)

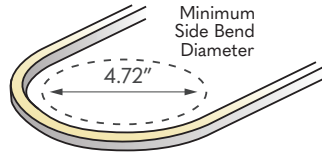

PHYSICAL

Environment	IP65
Ambient Temp	-4° to 113°F (-20° to 45°C)
Cut Length	12" Inches (30.48 cm)
Min. Bend Diameter	6.3" Inches (16 cm)
Max Run	164' Feet (49.99 m)
Dimensions	W: 0.83" Inches (21.08 mm) H: 0.59" Inches (14.99 mm)

ILLUMINATION DETAILS (RED)

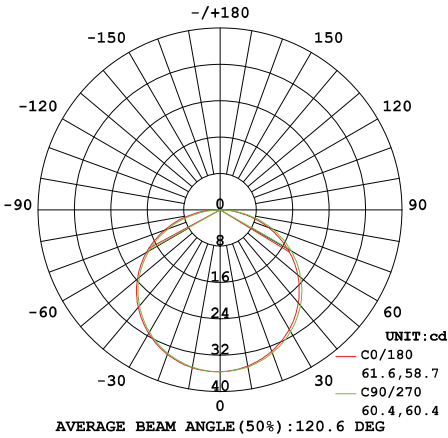

POWER DETAILS

Watts Per Foot	3.0 W/Ft
Voltage	120 VDC
Wire Size	18 AWG
Lead	1.64' Feet or 4.92' Feet
Jumper	3" Inch Min / 48" Inch Max
Dimming	Phase-cut/triac
Dimming Control	Dimmers Confirmed to be Compatible: Take care not to exceed the dimmer's power rating, recommended max run lengths noted below: Triac, Lutron DVCL-153P (max 133') Triac, Lutron DVELV-300P (max 66') Triac, Lutron DVLV-10P (all lengths, up to 164' max run of strip)

QUALITY ASSURANCE

Lumen Maintenance	50,000 Indoor Hours 36,000 Outdoor Hours
Warranty	5 Years Indoor, 3 Years Outdoor *For 16+ hour per day applications *4 Years Indoor, 2 Years Outdoor
Certifications	ETL Listed

Color	Peak Wave Length (nm)	FWHM (nm)	Output L/Ft	Efficacy L/W
RED	657	82	28	9
GREEN	502	43	175	58
BLUE	460	24	20	7
AMBER	620	102	118	39
PINK	n/a	n/a	98	33

Lumen values can vary +/- 10%

NoVA Flex LED, LLC retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Dec.19.24.05:33

800.595.6302

novaflexled.com