

ORDER GUIDE - POWER & CONTROL O-10V DIMMABLE DRIVER 24W



PART NUMBER

Ųp



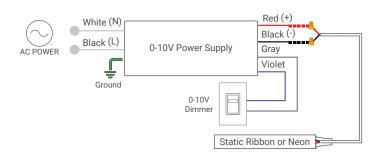

Notes:

INPUT

Voltage Range	120 ~ 277 VAC
Frequency	50 ~ 60 Hz
Current	0.96 A
Inrush Current	5 A / 120 V ~ 23.7 A / 277 V
Efficiency	> 87%
Power Factor	> 0.95
THD	< 20%
Current Consumption	0.35mA / Source

PROTECTION

Over Current	Yes
Over Voltage	Yes
Over Temperature	Yes; Hiccup Mode
Over Load	Yes; CC Mode
Short Circuit	Yes; Hiccup Mode
Warranty	2 - 5 Years (based on warranty of linear product purchased)

OUTPUT

Voltage	24VDC
Current	4100mA Max
Ripple	> 3%
Line Regulation	> 2%
Load Regulation	> 3%
Turn on Delay Time	> 0.3 Sec
Dimming Level	0.1% ~ 100% Flicker Free
Dimming Curves	Linear
Dimming	Current Reduction Dimming
Dimming Control	0-10V

ENVIRONMENT

Protection Rating	UL 1310, IP65, Class 2, UL 8750
Ambient Temp	-13° to 104° F (-25° to 40° C)
Max Case Temp	149° F (65° C)
Storage Temp	-40° ~ 176° F (-40° ~ 80° C) 10 ~ 95% HC
Expected Life	50,000 Hrs
Audible Noise	> 24 dB Class A

To meet local / national codes, this driver may require mounting in approved UL Enclosure.

PHYSICAL



30.4 oz





Nova Flex LED, LLC. retains the right to modify the design of our products at any time as part of the company's continual product improvement program.

PROJECT Rev: Nov14 24/18-11 FIXTURE

PHASE

800.595.6302

DATE