

# ORDER GUIDE - POWER & CONTROL


## MAXX DIMMABLE | 30W



PART NUMBER

POWER SUPPLY

Series	Family	Type	Wattage	Voltage	Dimmable
NF	PS	MAXX	30W	24V	0/10V

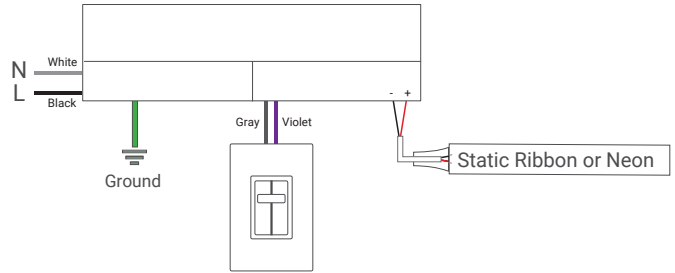

Notes:

### INPUT

Voltage Range	100 ~ 277 VAC
Frequency	47 ~ 63 Hz
Current	0.5 A
Inrush Current	7 A 120VAC / 12 A 277VAC
Efficiency	79% 120VAC / 80% 277VAC
Power Factor	> 0.99 120VAC / 0.95 277VAC
THD	<20%

### PROTECTION

Over Temperature	Yes
Over Load	Yes
Short Circuit	Yes
Warranty	2 - 5 Years (based on warranty of linear product purchased)

### OUTPUT

Voltage	24VDC
Current	1.25 A
Load Regulation	1%
Optimal Load	10% - 95%
Dimming Level	0.01%
Dimming	PWM / PFM   IEEE PAR1789 No Effect Level Green for Flicker when used with Nova Flex drivers and Dimming modules.
Dimming Control	0-10V   MLV / ELV   DALI   DMX


### ENVIRONMENT

Protection Rating	UL Listed (UL8750), cUL Listed, Class 2 Unit, Type HL rated. FCC
Operating Temp	-4° to 113° F (-20° to 45° C)
Storage Temp	-40° ~ 176° F (-40° ~ 80° C) 10 ~ 95% HC

To meet local / national codes, this driver may require mounting in approved UL Enclosure.

### PHYSICAL

Weight | 33.5 oz

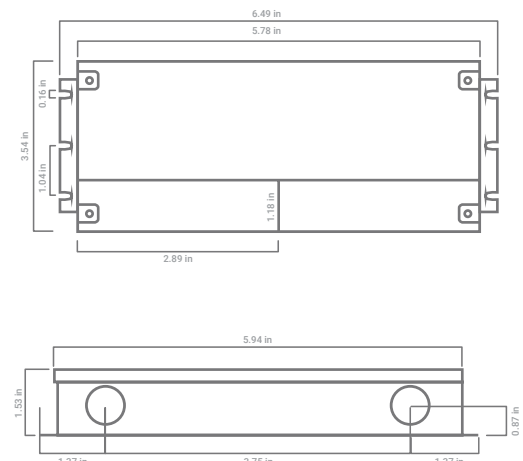

Nova Flex LED, LLC. retains the right to modify the design of our products at any time as part of the company's continual product improvement program.

PROJECT

FIXTURE

PHASE

DATE

Rev: Nov.14.24/18:11

800.595.6302

novaflexled.com