


ORDER GUIDE - POWER & CONTROL

DMX PIXEL DECODER



PART NUMBER




Notes:

DATA

| | |
|-------------------|---|
| Input Signal | DMX512 |
| Input Voltage | 5 ~ 24 VDC |
| Output Signal | SPI |
| Decoding Channels | 512 |
| DMX512 Socket | XLR-3, Green Terminal |
| Dimming Range | 0 ~ 100% |
| Working Temp | -22° to 149° F (-30° to 65° C) |
| Weight | 300 g |
| Dimming | PWM / PFM IEEE PAR1789 No Effect Level Green for Flicker when used with Nova Flex drivers and Dimming modules. |
| Dimming Control | DMX, 3 channels per fixture, fixed |

DIMENSIONS

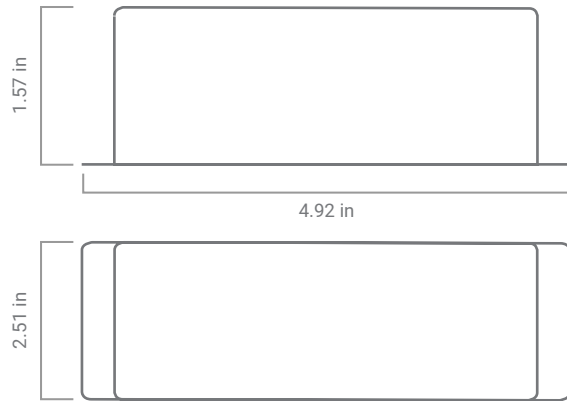

Nova Flex LED, LLC. retains the right to modify the design of our products at any time as part of the company's continual product improvement program.