ORDER GUIDE - POWER & CONTROL WALL MOUNT ADJ DIM | S3I





PART NUMBER






DATA

Output Signal	RF Signal
Operation Frequency	916.5 MHz
Power Supply	3V (CR2025 Battery)
Operating Temperature	32° to 86° F (0° to 30° C)
Wireless Range	50' Ft (15.24 m)
Input Voltage	12 ~ 36 VDC
Dimming	PWM / PFM IEEE PAR1789 No Effect Level Green for Flicker when used with Nova Flex drivers and Dimming modules.
Dimming Control	Proprietary RF

DIMENSIONS

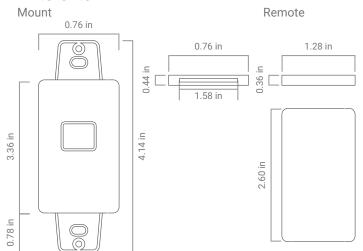


S3I WIRELESS RECIEVER

NF-S3I-WR-1009





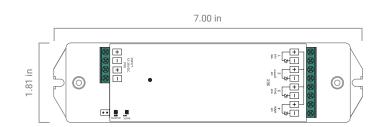

Nova Flex LED, LLC. retains the right to modify the design of our products at any time as part of the company's continual product improvement program.

PROJECT FIXTURE PHASE DATE

Rev: Nov.15.24/11:11 800.595.6302 novaflexled.com