


# ORDER GUIDE - POWER & CONTROL STATIC TOUCH PANEL | S3I



PART NUMBER




Notes:

## DATA

	DC	AC
Output Signal	RF Signal	RF Signal
Power Supply	12 ~ 24 VDC	100 ~ 240 VAC
Power Consumption	200 mA	15 mA
Operating Temperature	32° to 104° F (0° to 40° C)	
Relative Humidity	8 ~ 80%	
Wireless Range	50' Ft (15.2 m)	
Input Voltage	12 ~ 36 VDC	
Dimming	PWM / PFM   IEEE PAR1789 No Effect Level Green for Flicker when used with Nova Flex drivers and Dimming modules.	
Dimming Control	Proprietary RF	


Low Voltage Power Supply Required

## DIMENSIONS

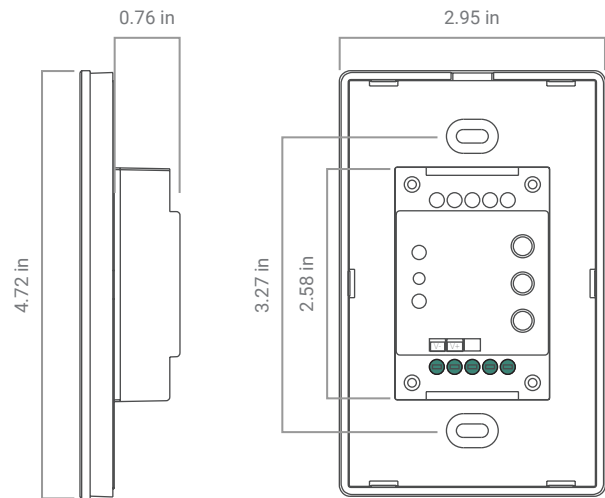

## S3I WIRELESS RECIEVER

NF-S3I-WR-1009

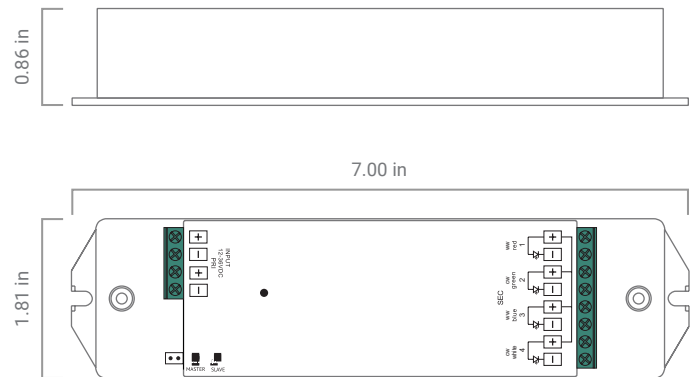

Nova Flex LED, LLC. retains the right to modify the design of our products at any time as part of the company's continual product improvement program.

PROJECT

FIXTURE

PHASE

DATE

Rev: Nov.15.24/11:11

800.595.6302

novaflexled.com